

Model Number


V15S-G

Cable connector, M12, 5-pin, ready for assembly

Features

- Screw terminal connection
- Metal locking


Dimensions

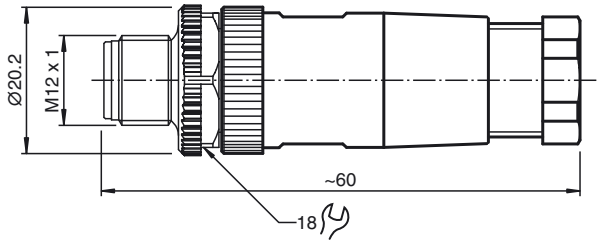

Technical data

General specifications		
Number of pins		5
UL File Number		E363587
Electrical specifications		
Operating voltage	U_B	max. 125 V AC/DC
Operating current	I_B	max. 4 A
Volume resistance		< 8 mΩ
Ambient conditions		
Ambient temperature		-40 ... 85 °C (-40 ... 185 °F)
Pollution Degree		3
Mechanical specifications		
Degree of protection		IP67
Connection		1 x M12 connector, straight Screw terminals for max. 0.75 mm^2 PG7 cable gland
Material		
Contacts		CuZn
Contact surface		CuSnZn
Connector		CuZn
Body		PA
Cable		
Sheath diameter		4 ... 6 mm
Compliance with standards and directives		
Standard conformity		
Degree of protection		EN 60529:2000

Electrical connection



Release date: 2015-02-24 15:55 Date of issue: 2015-02-25 229220_eng.xml