Rittal – The System.

Faster – better – everywhere.

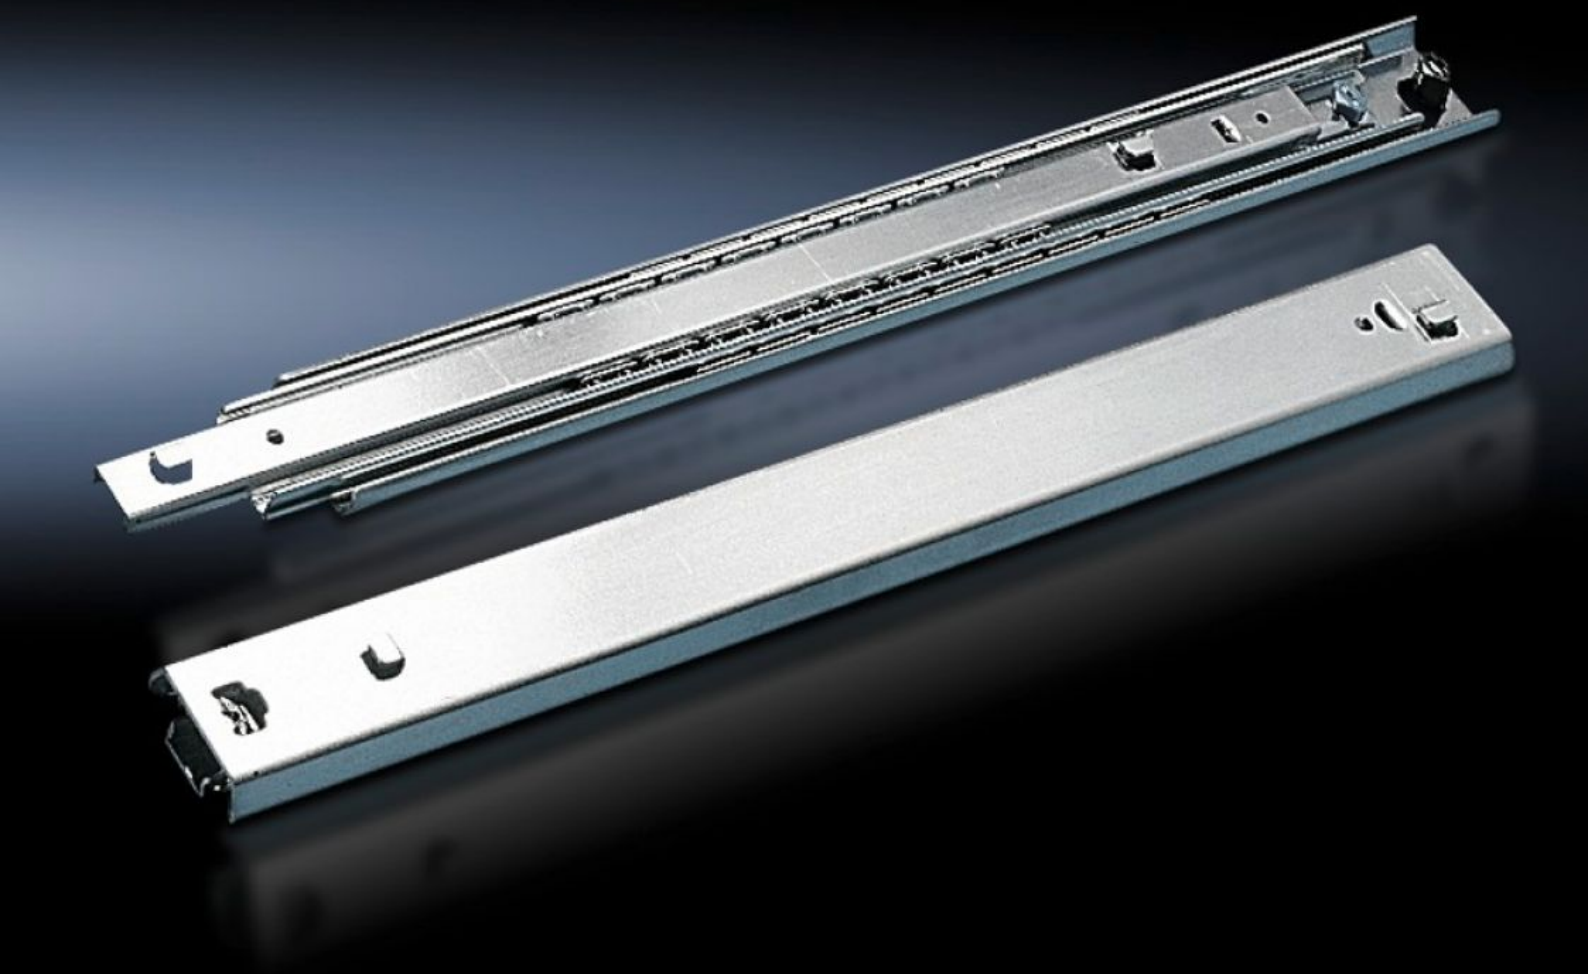

# DK 7065.000
# Telescopic slides

State: 1/2/2023 (Source: rittal.com/in-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# DK 7065.000 - Telescopic slides for component shelves, for mounting on the VX enclosure frame and for upgrading existing VX and TS applications

For retrospectively converting fixed component shelves to full withdrawal by exchanging the fastening bolts or mounting rails (heavy-duty version) for the telescopic slides.

## Features

| | |
|---|---|
| Model No. | DK 7065.000 |
| Product description | Fixed component shelves are easily converted to full withdrawal. For this purpose, the existing fastening bolts or mounting rails (heavy-duty version) are exchanged for the telescopic slides. |
| Material | Sheet steel |
| Surface finish | Zinc-plated |
| Suitable for component shelf depth | 500 mm |
| Load capacity | 100 kg |
| Note | For installation and locking on a 25 mm pitch pattern in the enclosure depth. |
| Packs of | 2 pc(s). |
| Weight/pack | 3.036 kg |
| Copper weight (kg per piece) | 0 |
| Customs tariff number | 73269098 |
| EAN | 4028177123878 |
| ETIM 7.0 | EC002620 |
| ECLASS 8.0 | 27189261 |

© Rittal 2023

# Approvals

| | |
|---|---|
| Approvals | GOST |

# Tender text

Telescopic slides for 500 mm deep component shelves
Version: max. load capacity 100 kg
The telescopic slides are installed between the installation kit and a 500 mm deep component shelf. The telescopic slides
have a maximum load capacity of 100 kg and are lockable in two positions.
Material: sheet steel, zinc-plated
For component shelf depth: 500 mm

© Rittal 2023