
M0RA

EMPTY NON-METALLIC ENCLOSURE, WITH RESET BUTTON, FOR BG06, BG09, BG12 CONTACTORS




Product designation			Empty enclosures
Product type designation			M0RA
Electrical features			
Maximum operating current (≤440V)		A	12
Components			
Contactor standard supplied			BG06, BG09, BG12
Thermal relay to purchase separately			RF9
Mechanical features			
Weight		g	445
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
Frontal IP degree			IP65
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

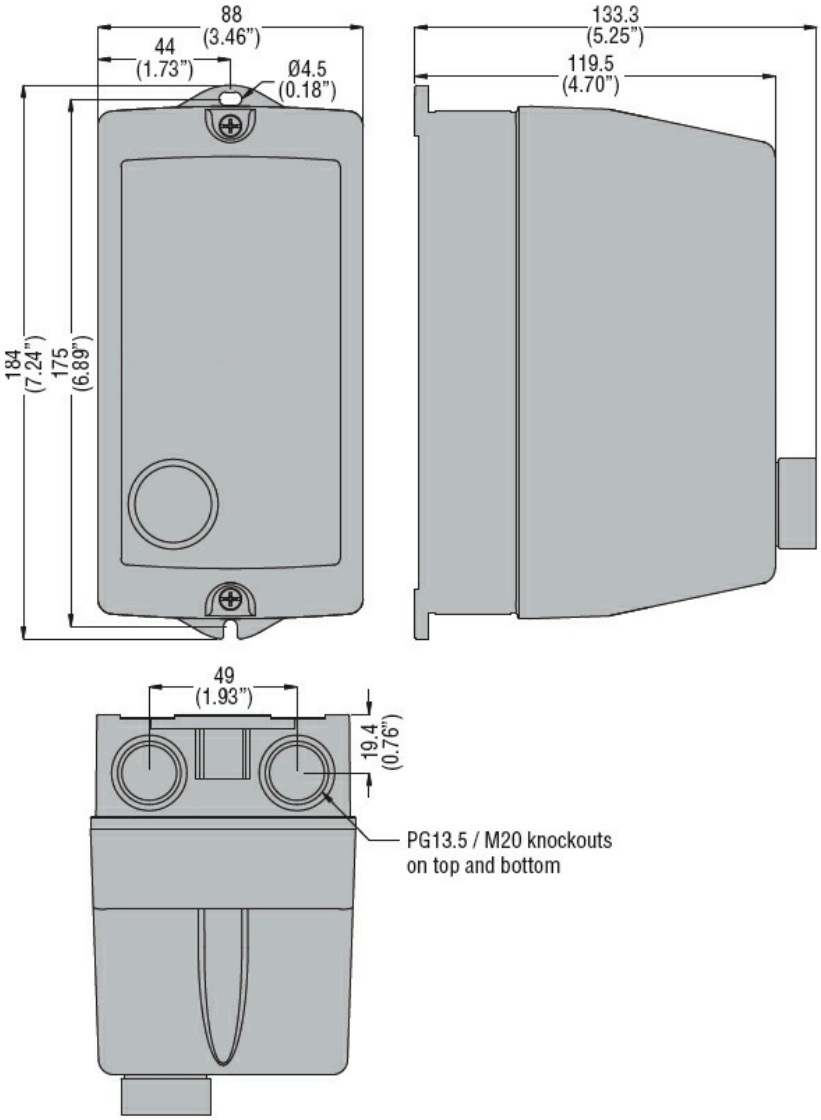

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

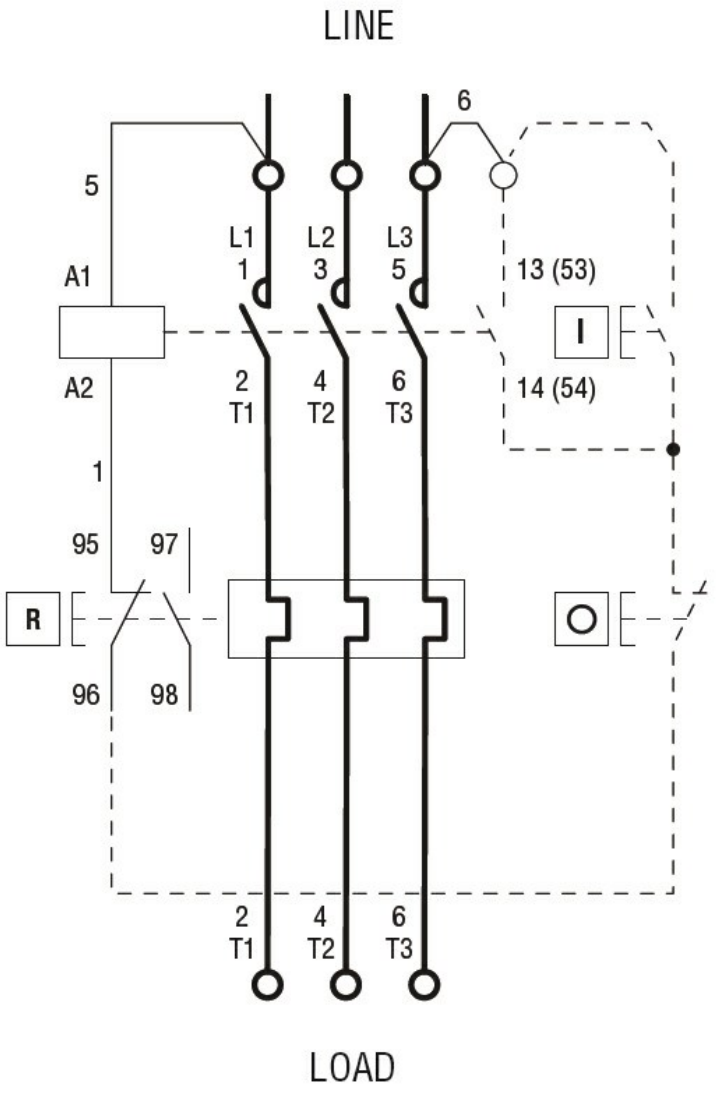

R = Reset; I = Start; O = Stop

Certifications and compliance

Compliance

	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508

Certificates

	cULus

ETIM classification

ETIM 8.0	EC000200 - Enclosure for control circuit devices

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding