"High performance" click wrenches

SERIES 306 | CLICK WRENCHES
"HIGH PERFORMANCE"


ISO 6789 TYPE II - CLASS A PRECISION ITSELF IN HEAVY DUTY!





HIGH PERFORMANCE
- Intensive use: reliability of mechanism tested to 50,000 cycles.
- Durable accuracy: remains within ISO 6789 tolerances after more than 5,000 cycles.
- Accuracy set at ± 2 % ex works.

SAFE
- Accurate, tamper-proof vernier. Easy to read and set for error-free adjustment.
- Automatically locking torque adjustment, no risk of accidental release.

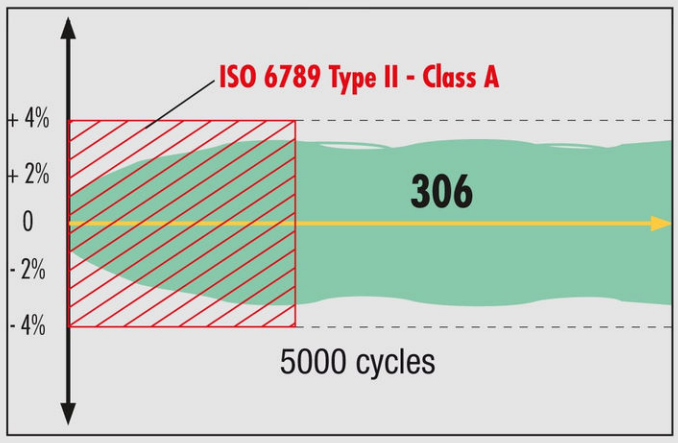

ERGONOMIC
- Ergonomic handle.
- Increased length for improved torque transfer and accuracy.
- Hanging ring for storage.

306D - Click wrenches without accessories



NF EN ISO 6789, ISO 6789, DIN EN ISO 6789
- Factory accuracy: ± 2% except:
- R.306-25D - K.306A600 - K.306A1000 (± 4%).
- R.304DA (± 6%).
- Reliability of mechanism: 50 000 cycles (wrenches up to 200 N.m).
- Use possible with accessories:
- End fitting: 9 x 12 or 14 x 18 mm.
- Diameter: 30 mm.
- One-way wrenches usable for unscrewing by reversing the bits.
- Numbered wrenches supplied with ISO 6789 calibration certificate.
- Supplied in plastic box.

	Capacity [N.m]	Attachment	Graduation [N.m]	L [mm]	Box	⚖ [kg]
R.304DA	1 - 5	9 x 12	0,05	185	BP.102	0,290
R.306-25D	5 - 25	9 x 12	0,10	271	BP.D1	0,450
J.306-50D	10 - 50	9 x 12	1,00	357	BP.D2	0,930
S.306-100D	20 - 100	9 x 12	1,00	437	BP.D2	1,050
S.306-200D	40 - 200	14 x 18	1,00	515	BP.D3	1,260
S.306-350D	70 - 350	14 x 18	2,00	725	BP.D3	1,790
K.306-600D	120 - 600	14 x 18	2,00	945	BP.D600	4,600
K.306-1000D	200 - 1000	Ø 30 mm	4,00	1280	BP.D1000	5,900