

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/12/13	D.GRIFFIN

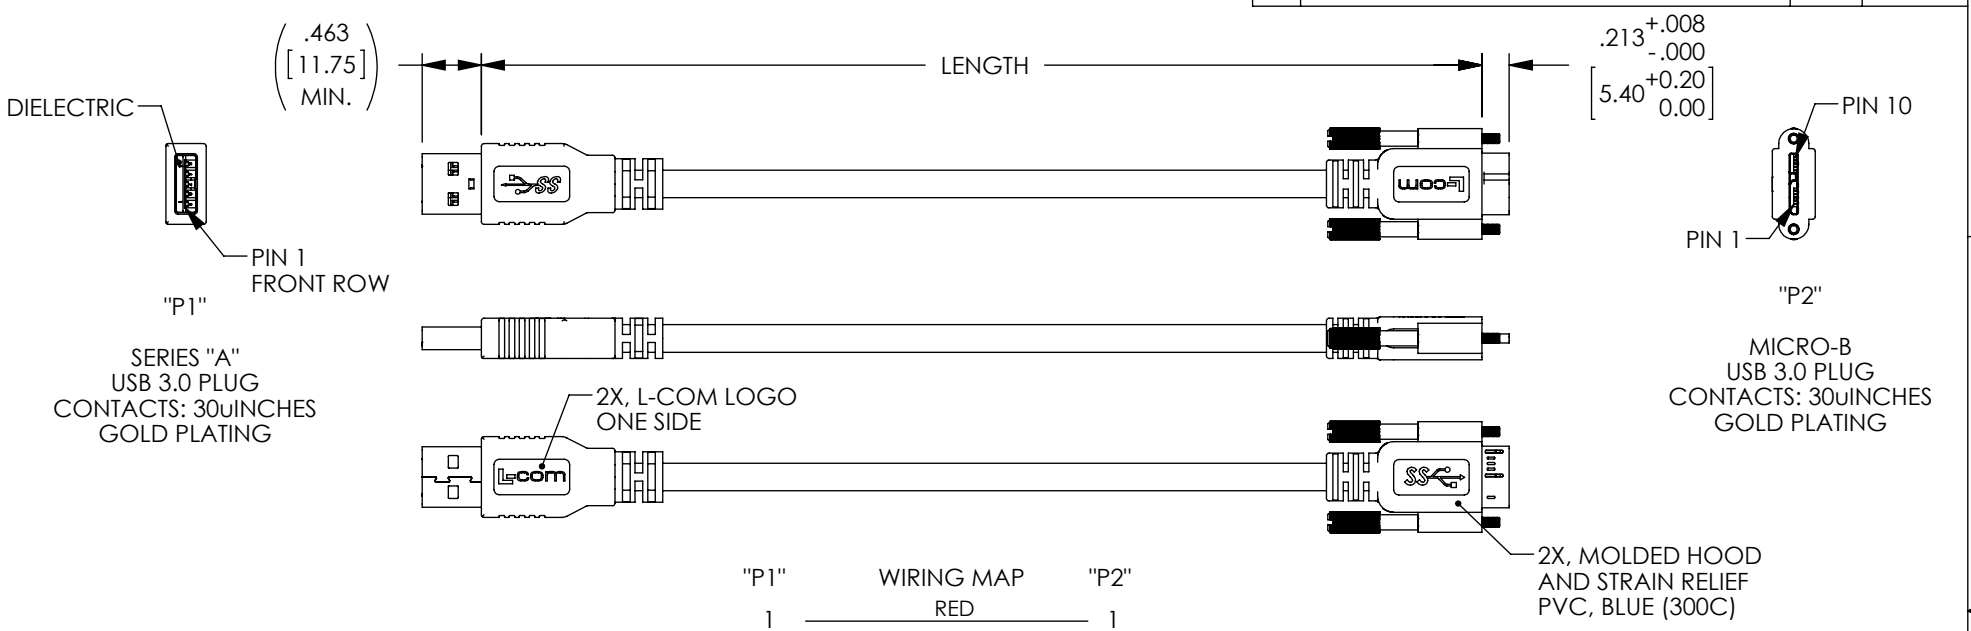

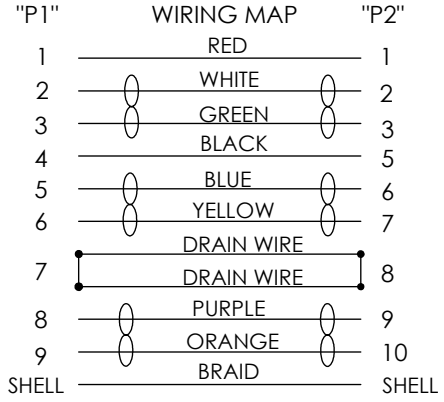

MODEL NUMBER	LENGTH METERS [FEET]
CAVISU3AMICB-03M	0.3 [.98]
CAVISU3AMICB-05M	0.5 [1.64]
CAVISU3AMICB-1M	1.0 [3.28]
CAVISU3AMICB-2M	2.0 [6.56]
CAVISU3AMICB-3M	3.0 [9.84]
CAVISU3AMICB-5M	5.0 [16.41]

NOTES:

CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: PVC, BLUE (PANTONE 300C)

MISCELLANEOUS:
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	6/3/13
CHECKED BY D.DESJARDIN	6/3/13
APPROVED BY S.SMITH	6/3/13

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB 3.0

PRODUCT DESCRIPTION
CA USB3.0 A/MICRO B W/HDW VISION 3.0

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CAVISU3AMICB	A

SCALE: NONE | CAD FILE: CAVISU3AMICB.SLDDRW | SHEET 1 OF 1