Sicherheits-Winkeleinbaubuchse
- Winkeleinbaubuchse für Leiterplattenmontage
- Steckanschluss Ø 4 mm
- den Warnhinweis WH 034 finden Sie unter www.schuetzinger.de

Best.-Nr. SWEB 8094 Au / ..(Farbe)
- Kontaktteile **vergoldet und verzinnt**
- Isolierteile PA 6.6 (Polyamid)
- **Farben** siehe Tabelle


⚠ **WH 034**


Safety angled socket
- *angled safety socket for fixture on PCB*
- *socket Ø 4 mm*
- *please visit www.schuetzinger.de to find the warning notice WH 034*

Order No. SWEB 8094 Au / *..(colour)*
- *contact parts* ***gold-plated and tin-plated***
- *insulation* *PA 6.6 (Polyamid)*
- ***colours*** *see table*

⚠ **WH 034**

Lochbild für Leiterplatten-Layout
hole pattern for PCB layout

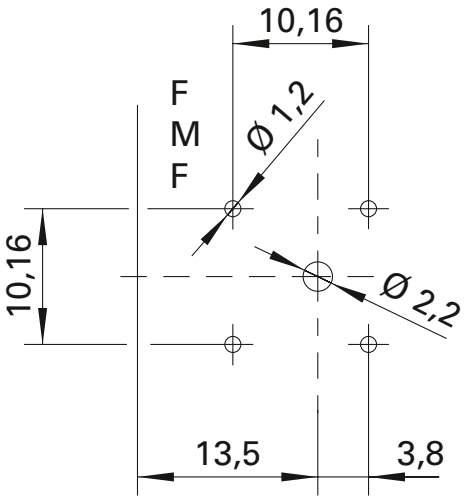

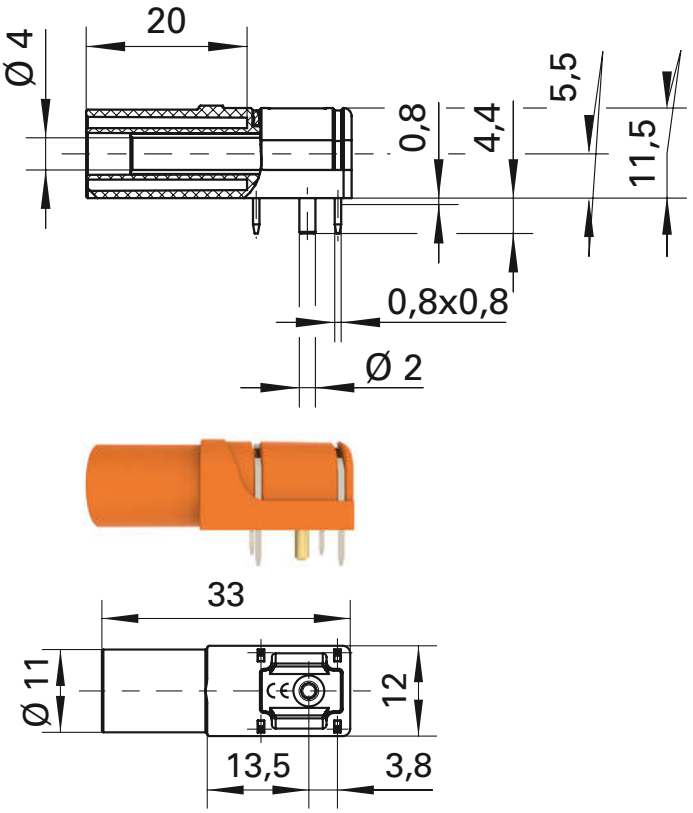

Allgemeine Angaben	
Best.-Nr. [1]	**SWEB 8094 Au /** ..(Farbe) Kontaktteile vergoldet und verzinnt
Farben	schwarz, rot, blau, braun, gelb, grün, grau, weiß, orange, violett
Technische Daten	
Anschluss	Leiterplatte
Durchgangswiderstand	10 mΩ
Bemessungsspannung [2]	1000 V CAT III
Bemessungsstrom [2]	24 A
Betriebstemperatur	von -25 °C bis +80 °C

General information	
Order No. [1]	***SWEB 8094 Au /*** *..(colour)* *contact parts gold-plated and tin-plated*
colours	*black, red, blue, brown, yellow, green, grey, white, orange, purple*
Technical data	
terminal	*PCB*
transition resistance	*10 mΩ*
rated voltage [2]	*1000 V CAT III*
rated current [2]	*24 A*
operating temperature	*from -25 °C to +80 °C*

[1] andere Kontaktoberflächen und Farben auf Anfrage
[2] bei normalen Umgebungstemperaturen

[1] *other contact platings and colours on request*
[2] *at normal ambient temperatures*