KombiSIGN 50 / Anschlusselement 845

# Terminal element Cage Clamp 12-230VAC/DC




| | |
|---|---|
| **Part No.:** | **845.010.00** |
| **Series:** | **KombiSIGN 50** |

| **MECHANICAL DATA** | |
|---|---|
| Height | 65 mm |
| Diameter | 52 mm |
| Materials | PA-GF |
| Housing colour | Black |
| Protection category | IP54 |
| Connection | Spring-type terminal |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Cable entry | Through hole |
| Cable entry maximum | d = 9 mm |
| Tension relief | Not present |
| Type of fixing | Single-hole mounting<br>Tube mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 94 g |
| Product weight | 78 g |

| **ELECTRICAL DATA** | |
|---|---|
| Operating voltage | 12-230V |
| Operating voltage type | AC/DC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

| **APPROVAL DATA** | |
|---|---|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / Anschlusselement 845

# Terminal element Cage Clamp 12-230VAC/DC

| | |
|---|---|
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

**DRAWING**

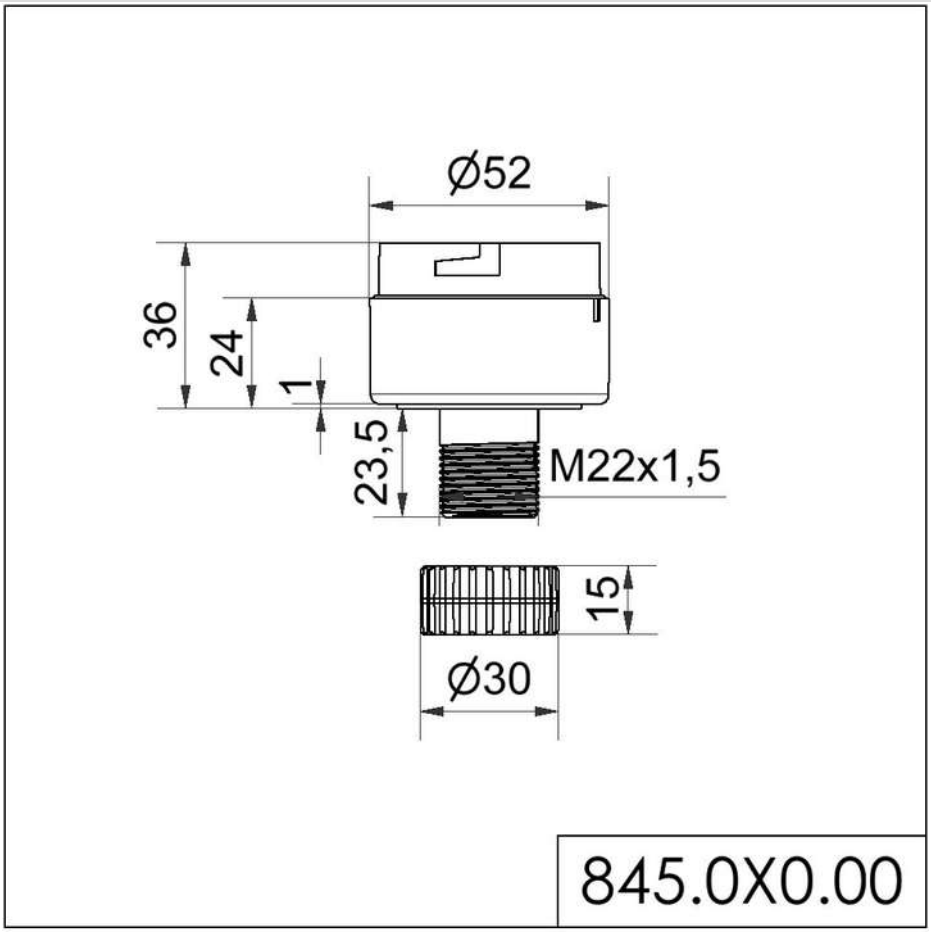


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.