Multi-Contact

STÄUBLI

XZG425



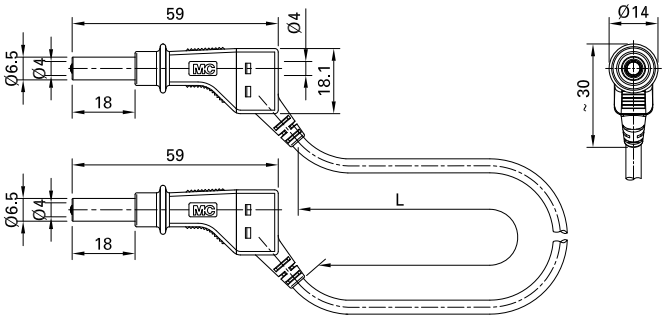

Item number 66.9407- ☐ *

Highly flexible, with insulation in PVC especially suitable for connecting electrical devices not (yet) equipped with safety sockets. With stackable Ø 4 mm MULTILAM plugs on both ends with protective collar and retractable sleeve to prevent accidental touching.

Technical data	
Diameter of plug system	4 mm
Rated Values	600 V, CAT II, 32 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Lead cross section	2.5 mm²
Lead lengths ☐	50 cm; 100 cm; 150 cm; 200 cm
Lead insulation	PVC
Colours *	20 21 22 23 24 25 26 27 28
Test accessory acc. to	IEC EN 61010-031
Approvals	CE
Remarks	Other color and/or length combinations available on request.

Stäubli Electrical Connectors AG Stockbrunnenrain 8 4123 Allschwil/Switzerland
Tel.: +41 61 306 55 55 Fax: +41 61 306 55 56 ec.ch@staubli.com www.staubli.com

©2018 Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. Data sheet XZG425 10.2018