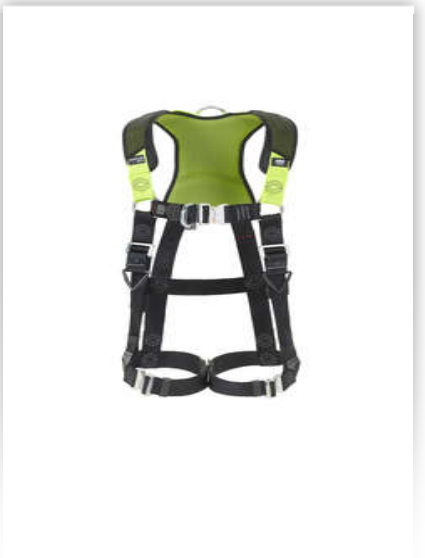


Product Family
Miller H500 series

Working at height can be a taxing job. Not only are construction workers generally at risk of serious injury or fatality, but long hours spent in a heavy, restrictive harness can be uncomfortable, painful, and cumbersome, leading workers to be less compliant and putting themselves more at risk.
The Honeywell Miller H500 Safety Harness synthesizes safety, quality, and comfort. Whereas other harnesses protect workers from serious injury at the expense of their long-term well-being, the Honeywell Miller H500 aims beyond compliance to keep workers safe and supported – making your job easier and keeping you safer.
The new Miller H500 range is available with shoulder/back padding, Mating buckles or Automatic Quick-release buckles

Honeywell

Product Numbers & Ordering Information

	Product Numbers	Details
	1036081	**Miller H500 Industry Comfort (IC6)** with Shoulder/back pad Automatic buckles Front D ring. Size 1
	1036082	**Miller H500 Industry Comfort (IC6)** with Shoulder/back pad Automatic buckles Front D ring. Size 2
	1036083	**Miller H500 Industry Comfort (IC6)** with Shoulder/back pad Automatic buckles Front D ring. Size 3
	1036085	**Miller H500 Industry Comfort (IC7)** with Shoulder/back pad Automatic buckles Front web loops. Size 1
	1036086	**Miller H500 Industry Comfort (IC7)** with Shoulder/back pad Automatic buckles Front web loops. Size 2

© Honeywell International Inc.

	1036087	**Miller H500 Industry Comfort (IC7)** with Shoulder/back pad Automatic buckles Front web loops. Size 3
	1036109	**Miller H500 Quick Fit (QF1)** with Mesh vest Automatic buckles Front web loops. Size 1
	1036121	**Miller H500 Quick Fit (QF1)** with Mesh vest Automatic buckles Front web loops. Size 2
	1036122	**Miller H500 Quick Fit (QF1)** with Mesh vest Automatic buckles Front web loops. Size 3
	1036089	**Miller H500 Industry Standard (IS1)** with Mating buckles. Size 1
	1036090	**Miller H500 Industry Standard (IS1)** with Mating buckles. Size 2
	1036091	**Miller H500 Industry Standard (IS1)** with Mating buckles. Size 3
	1036093	**Miller H500 Industry Standard (IS2)** with Automatic buckles. Size 1
	1036094	**Miller H500 Industry Standard (IS2)** with Automatic buckles. Size 2
	1036095	**Miller H500 Industry Standard (IS2)** with Automatic buckles. Size 3
	1036097	**Miller H500 Industry Standard (IS3)** with Mating buckles Front D ring Size 1
	1036098	**Miller H500 Industry Standard (IS3)** with Mating buckles Front D ring Size 2
	1036099	**Miller H500 Industry Standard (IS3)** with Mating buckles Front D ring Size 3

© Honeywell International Inc.

	1036101	**Miller H500 Industry Standard (IS4)** with Automatic buckles Front D ring Size 1
	1036110	**Miller H500 Industry Standard (IS4)** with Automatic buckles Front D ring Size 2
	1036111	**Miller H500 Industry Standard (IS4)** with Automatic buckles Front D ring Size 3
	1036113	**Miller H500 Industry Standard (IS5)** with Mating buckles Front web loops. Size 1
	1036103	**Miller H500 Industry Standard (IS5)** with Mating buckles Front web loops. Size 2
	1036104	**Miller H500 Industry Standard (IS5)** with Mating buckles Front web loops. Size 3
	1036106	**Miller H500 Industry Standard (IS6)** with Automatic buckles Front web loops Size 1
	1036107	**Miller H500 Industry Standard (IS6)** with Automatic buckles Front web loops Size 2
	1036108	**Miller H500 Industry Standard (IS6)** with Automatic buckles Front web loops Size 3
	1036123	**Miller H500 High Visibility (HVY1)** with High Viz Yellow jacket Automatic buckles Front web loops. Size 1
	1036124	**Miller H500 High Visibility (HVY1)** with High Viz Yellow jacket Automatic buckles Front web loops. Size 2
	1036125	**Miller H500 High Visibility (HVY1)** with High Viz Yellow jacket Automatic buckles Front web loops. Size 3
	1036126	**Miller H500 High Visibility (HVY2)** with High Viz Yellow jacket Automatic buckles Front D ring. Size 1

© Honeywell International Inc.

	1036127	**Miller H500 High Visibility (HVY2)** with High Viz Yellow jacket Automatic buckles Front D ring. Size 2
	1036128	**Miller H500 High Visibility (HVY2)** with High Viz Yellow jacket Automatic buckles Front D ring. Size 3
	1036129	**Miller H500 High Visibility (HVO1)** with High Viz Orange jacket Automatic buckles Front web loops. Size 1
	1036130	**Miller H500 High Visibility (HVO1)** with High Viz Orange jacket Automatic buckles Front web loops. Size 2
	1036131	**Miller H500 High Visibility (HVO1)** with High Viz Orange jacket Automatic buckles Front web loops. Size 3
	1036132	**Miller H500 High Visibility (HVO2)** with High Viz Orange jacket Automatic buckles Front D ring. Size 1
	1036133	**Miller H500 High Visibility (HVO2)** with High Viz Orange jacket Automatic buckles Front D ring. Size 2
	1036134	**Miller H500 High Visibility (HVO2)** with High Viz Orange jacket Automatic buckles Front D ring. Size 3

Overview

Key Features

- Light-weight and ergonomic
- Highly breathable shoulder/back padding
- Comfortable around the legs, waist, back, and shoulders
- Increased freedom of movement
- Smart rebar hook/lanyard keepers and SRL web link
- Side adjustment strap for better ergonomic fit - Quick and easy to fit and adjust
- Improved visible stitch pattern
- Fall-impact indicators

Benefits:

GREATER FREEDOM OF MOVEMENT

- New shoulder/back padding design minimises overhead muscular fatigue (overexertion)
- New specially formulated webbing flexes to accommodate movement and body contours for optimum comfort around legs and shoulders (6% stretch)
- New side-adjustment straps for better ergonomic fit
- H-Design leg design for greater user comfort

© Honeywell International Inc.

- New side-adjustment straps for better ergonomic fit
- H-Leg design for greater user comfort

MORE BREATHABILITY

- Workers are kept drier and cooler with new “best in class” anatomically and ergonomically designed pressure-relief breathable shoulder/back padding

SMART & INTUITIVE FEATURES

- Smart anti-tangle for hassle-free donning experience
- Dedicated SRL web link for an easy attachment of personal SRLs
- User friendly Pull-Free Lanyard keepers allows users to attach lanyards when not in use
- Clearly identifiable fall impact indicators for hassle-free inspection
- Improved visible stitch pattern for easy inspection
- Lightweight aluminium Quick-release Cobra® buckles
- Highly visible protected label protection for hassle-free inspection
- Water repellent webbing
- Rated 140 kg (max weight capacity)

Recommended Industries/Use

- Construction
- Utilities

Hazards

- Fall from height

Regulations

- EN361 - :2002

Literature & Documents

HIS-FALL-H500-Harness-BRO-EN-A4-V3_0820_highres
http://www.honeywellsafety.com/Supplementary/Documents_and_Downloads/Fall_Protection/4295004838/1033.aspx

Technical Support

Technical Support

Northern and Central Europe Phone - +49 (0) 928/8302 – 205
Email – techniservnorth.hsp@honeywell.com

Southern Europe, UK & Ireland Phone - +33 (0) 2 48 52 40 4
Email – techniserv.hsp@honeywell.com

© Honeywell International Inc.

© Honeywell International Inc.