STRIPMASTER® WIRE STRIPPERS

Stripmaster® and Stripmaster® Lite Wire Strippers



- One-step stripping enhances productivity
- Spring-action motion increases leverage and reduces operator fatigue
- Precision-ground, knife-type blades provide clean, accurate stripping
- Sturdy die-cast frame provides long-term durability
- Wire gripper holds wire securely in position
- Stripmaster® Lite designed for smaller hands – 3/4 the size of the standard Stripmaster®

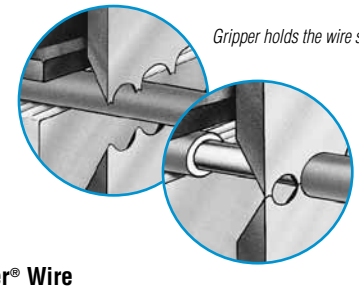

Gripper holds the wire securely in position.

Knife-type stripping blades have form-ground holes which penetrate the insulation like a knife, giving a clean insulation cut.



Stripmaster® Wire Stripper



Stripmaster® Lite Wire Stripper

Stripmaster® Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter in Inches (mm) Wire Size AWG													Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.
6	8	10	12	14	16	18	20	22	24	26	28	30			
	0.159 (4.0)	.141 (3.6)	.106 (2.7)										45-090* or 45-290**	L-4419	L-5620
		.144 (3.6)	.105 (2.7)	.085 (2.2)	.073 (1.8)	.073 (1.8)							45-091	L-4420	L-5620
		.144 (3.6)	.113 (2.9)	.090 (2.3)	.072 (1.8)	.061 (1.5)	.048 (1.2)	.048 (1.2)					45-092* or 45-292**	L-4421	L-5620
				.090 (2.3)	.072 (1.8)	.061 (1.5)	.039 (1.0)	.039 (1.0)					45-093	L-4422	L-5620
.230 (2.3)	.198 (5.0)												45-096	L-4453	L-4453
					.072 (1.8)	.061 (1.5)	.048 (1.2)	.039 (1.0)	.032 (0.8)	.026 (0.7)			45-097	L-4994	L-5620
							.048 (1.2)	.039 (1.0)	.032 (0.8)	.026 (0.7)	.021 (0.5)	.016 (0.4)	45-098	L-5361	L-5620
	.198 (5.0)	.167 (4.2)			.062 (1.6)	.055 (1.4)							45-099	L-8763	L-5620

*Boxed ** Blister Card Tolerances +001 - .005

Stripmaster® Lite Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter Inches (mm) Wire Size AWG										Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.
12	14	16	18	20	22	24	26	28	30			
		.072 (1.8)	.061 (1.5)	.048 (1.2)	.039 (1.0)					45-671	LB-1001	LB-1421
						.032 (0.8)	.026 (0.7)	.021 (0.5)	.016 (0.4)	45-672	LB-1002	LB-1421
.113 (209)	.090 (2.3)	.072 (1.8)	.061 (1.5)	All stranded wire						45-673	LB-1003	LB-1421
.096 (2.4)	.085 (2.2)	.073 (1.9)	.061 (1.5)	12 & 14 Solid Wire, 16 & 18 Stranded Wire						45-674	LB-1004	LB-1421

Tolerances +001 - .005

Stripmaster® Wire Strippers and Knife-Type Blades for Metric Wire

Specifications — Stripping Hole Diameter (mm) Wire Size mm²														Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.
0.05	0.1	0.15	0.22	0.34	0.5	0.75	1	1.5	2.5	4	6	8	10			
												4.3	5.0	**45-090-341**	**L-4419M**	**LA-2358**
						1.3	1.6	1.9	2.4	3	3.6			**45-092-341 or 45-292-341***	**L-4421M**	**LA-2358**
0.6	0.7	0.8	0.9	1.0	1.1									**45-098-341**	**L-5361M**	**LA-2358**

*Boxed Tolerances +001 - .005

Stripmaster® Lite Wire Strippers and Knife-Type Blades for Metric Wire

Specifications — Stripping Hole Diameter (mm) Wire Size mm²									Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.
0.05	0.1	0.15	0.22	0.34	0.5	0.75	1	1.5			
				1.0	1.1	1.3	1.6	1.9	**45-671-341**	**LB-1001M**	**H-2909**
0.6	0.7	0.8	0.9						**45-672-341**	**LB-1002M**	**H-2909**

Free Application Engineering Service available. Contact IDEAL INDUSTRIES, INC. for complete information at 1-800-324-9571 or download application at www.idealindustries.com/products/wire-processing.

Coax Stripmaster® Wire Strippers and Blades



Description	Coax Cable Type (RGU)	Repl. Blade Cat. No.	Cat. No.
Coax Stripmaster® for RG-6	RG-6	**LB-740**	**45-262**
Coax Stripmaster® for RG-58	RG-58	**LB-742**	**45-264**
Coax Stripmaster® for RG-59	RG-59	**LB-743**	**45-265**
Coax Stripmaster® for RG-6 QuadShield	RG-6 QuadShield	**LA-3953**	**45-282**

Coaxial Cables: two-step strip for termination, jacket and dielectric.

Stripmaster® Wire Strippers with Rectangular Holes



Description	Cat. No.	Replacement Blades (Pair) Cat. No.
For Flat Telephone Cable (.060 in. or 1.52mm)	**N/A**	**LB-1155**
For European Flat Lamp Cord	**45-089**	**L-8762**
For SP-SPT Lamp Cord	**45-095***	**L-4452**

*Also strips 2- and 3-conductor low-voltage wire used in E.E. and Touchplate remote control wiring system.

Transparent Adjustable Wire Stop Assembly

- Provides uniform stripping length



Optional Accessories	Cat. No.
Transparent Adjustable Wire Stop (for Stripmaster® Wire Strippers)	**L-5270**
Transparent Adjustable Wire Stop (for Stripmaster® Lite Wire Strippers)	**LB-1195**
Replacement Moveable Gripper	**L-1953**

Short Stop Latch

- Protects wire strands by limiting stripping stroke to 5/32 in.
- Retains slug until wire is ready for terminating



Replacement Frame Assemblies	Cat. No.
For Stripmaster® Wire Strippers	**L-5620**
For Stripmaster® Lite Wire Strippers	**LB-1421**