MURR ELEKTRONIK
stay connected

MOSA M12 male 0° X coded (IDC)


GBit Ethernet


Male straight, M12
8-pole, shielded
Clamping range cable entry: 5.5...9 mm
X-coded, 8-pole

Link to Product


Illustration



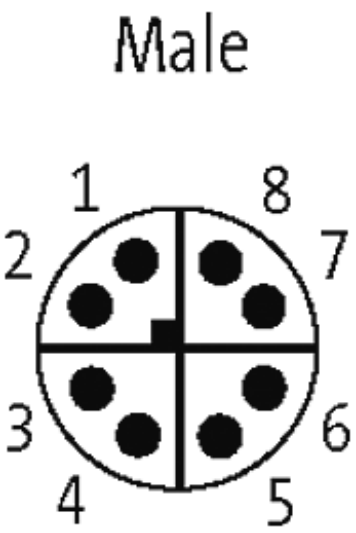

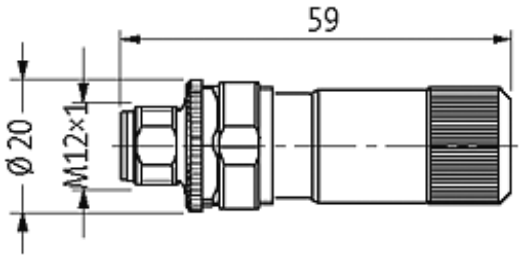

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 11/14

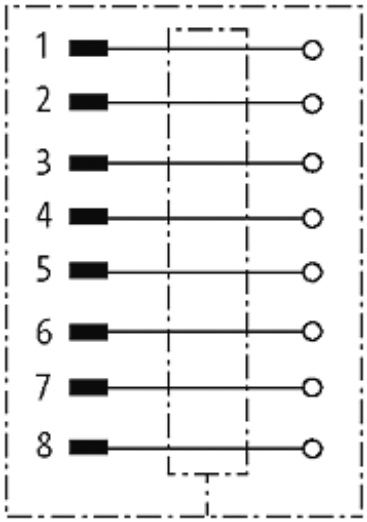

Product may differ from Image

Form	
	21101
Technical Data	
Operating voltage	50 V AC/60 V DC
Operating current per contact	max. 0.5 A
Connection cross section	0.14...0.34 mm²
Sealing range (cable diameter)	5.5...9.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	CuZn, nickel plated
General data	
Temperature range	-40...+85 °C
Commercial data	
customs tariff number	85369010
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 11/14