
PK2-T



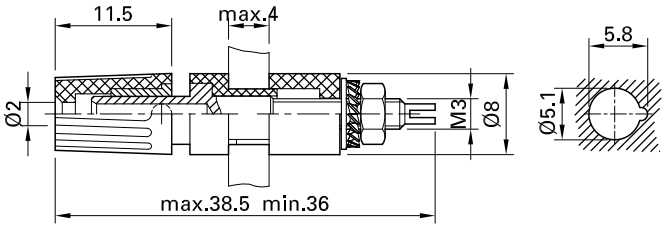

Item number 23.0290-*

Insulated, with Ø 2 mm rigid socket and insulated head undetachable. With Ø 2 mm cross hole for quick wire connection. Machined brass. For mounting, with anti-rotation lug, in frontpanels up to 4 mm thick.Connection: Threaded bolt M3.

Technical data	
Diameter of plug system	2 mm
Rated Values	30 VAC, 15 A / 60 VDC, 15 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Colours *	21 22
Thread	M3
Test accessory acc. to	IEC EN 61010-2-030

Stäubli Electrical Connectors AG Stockbrunnenrain 8 4123 Allschwil/Switzerland
Tel.: +41 61 306 55 55 Fax: +41 61 306 55 56 ec.ch@staubli.com www.staubli.com

©2018 Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. Data sheet PK2-T 10.2018