Serious Lights Industrial Range – Glossary

The Meaning of Symbols and Expressions

Symbol/Expression	Meaning
Light Source Cap-Type	Light Source Holder
CTLS	Colour Tuneable Light Source
MLS	Mains Operated Light Source
DLS	Directional Light Source
CLS	Connected Light Source
Useful Luminous Flux	The Total Perceived Light Emitted In All Directions By The Light Source
On-Mode Power (Pon)	Power Consumption When Light Is On
Standby Power (Psb)	Power Consumption When Light Is On Standby
Output Power (Pcg)	Power Output From Driver When Light Is On
No-Load Power (Pno)	Power Output From Driver When Light Is Off
Correlated Colour Temperature	How Yellow Or Blue Is The Colour Of The Emitted Light
Colour Rendering Index (CRI)	How Faithful Is The Emitted Light To Daylight (In Term Of Colour Perception)
R9 Colour Rendering Index Value	How Vibrant Are The Reds In The Spectrum
Rf	The Accuracy Of Colour Rendition Compared To Daylight
Rg	The Average Level Of Light Saturation Compared To Daylight
Colour Consistency	How Close/Similar Are The Spectrum Colours In Random Samples Of The Same Model Of Light
Peak Luminous Intensity	How Bright Is The Light In Lux (For The Specified Beam Angle)
Survival Factor	Percentage Of Lights Which Do Not Fail (Out Of Total Number Of Tested Lights); Measured Against The Stated Life Expectancy Of The Light Source.
The Lumen Maintenance Factor	A Measure Of The Light Fading As The Light Source Ages
Flicker Metric	Rate Of Flicker In Hz
Stroboscopic Effect Metric	How The Rate Of Flicker Effects (The Perception Of The Rotation For A) Rotating Or Oscillating Parts.
Displacement Factor	The Percentage Of The Supplied Power That Is Lost Inside The Lightsource When Operating
IP Rating	How Impervious The Luminaire Is To The Ingress Of Dust And Water
	The Driver Can Be replaced By End User
	The Lightsource Can Be Replaced By End User
	Energy Classification (A-G)

Serious Brands Ltd, Chapel Offices, Bierton, Bucks, HP22 5DW, Great Britain, Tel: +44 (0)1296 395400
Web: www.seriouslights.co.uk E-mail: info@seriouslights.co.uk

Alex Range Light Source Specifications

This light series contains; non-mains operating light source (NMLS), Directional Lightsource (DLS) and does not include a Colour Tuneable (CTLS) Lightsource.

Parameter	Value
Lighting Technology	LED
Light Source Cap-Type	MR16
Dimming Functionality	Dimmable
Wattage	5.5 W
Energy Efficiency Class	G
Useful Luminous Flux	400 lm
On-Mode Power (P_{on})	5.5 W
Standby Power (P_{sb})	0 W
Correlated Colour Temperature	4000 K
Colour Rendering Index (CRI)	99
R9 Colour Rendering Index Value	96
R_f	98
R_g	102
Peak Luminous Intensity At 500mm	8500 lx
Beam Angle	30˚ Available Options 20˚ and 36˚
Anti-glare shield	Frosted Glass
Survival Factor	1
Lumen Maintenance Factor	0.96
Displacement Factor (cos φ1)	N/A
Colour Consistency	2.2 McAdam Ellipses
Flicker	N/A
Stroboscopic Effect	N/A
IP Rating	IP20
Light Source Lifetime	30000 hours (Approx)







DISCLAIMER. All product information provided is, to the best of Serious Brands knowledge, accurate as of the date of publication. When ordering, refer to www.seriouslights.co.uk for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Serious Brands terms and conditions of sale; and (c) the relevant product warranty. To the extent that any contract is deemed formed between Serious Brands and the purchaser of Serious Brands products and/or an end-user, versions of documents available at www.seriouslights.co.uk as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.seriouslights.co.uk the latter shall prevail.

Alex Range Driver Specifications

Parameter			Value
Item No.			21180
Type of Object			Plug in or Integrated Control Gear
Control Gear Intended Use			LED or OLED Light Sources
Output Power (Pcg)			5.5W
Efficiency On Full load			83%
No-Load Power (Pno)			0.1W
Standby Power (Psb)			0.14W
Plug in Dimensions	Length: 78 mm	Width: 55 mm	Height 37mm
Integrated Driver Dimensions	Length: 65 mm	Width: 42 mm	Height 30mm
Input/Output Voltage			100-240 V/12-24 V AC/DC

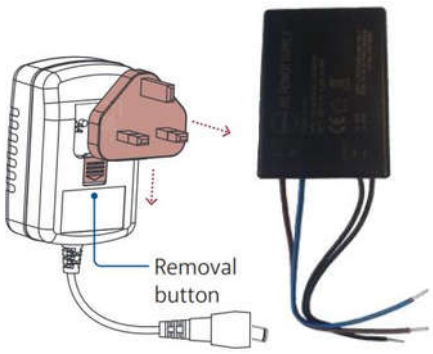

Plug in Driver Integrated Driver

The plug-in driver is detachable from the luminaire. The plug-type is interchangeable to enable use in international sockets. To change the plug type; press the removal button and pull the fitting to slide out then, click the alternative into place.

Examples Of Alex Range Dimensions (mm)

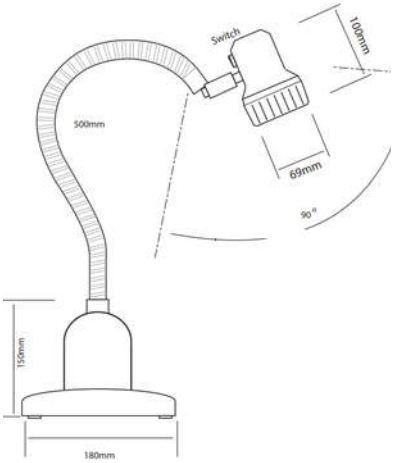

Table 90° Swivel Plug in Driver

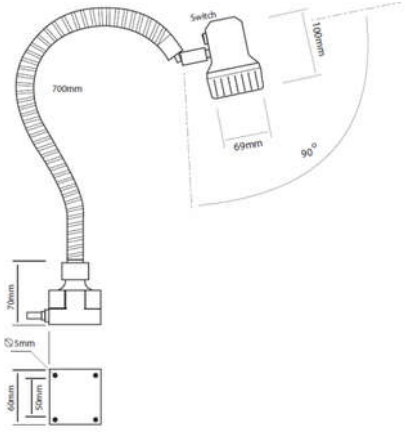

90° Swivel Plug in Driver

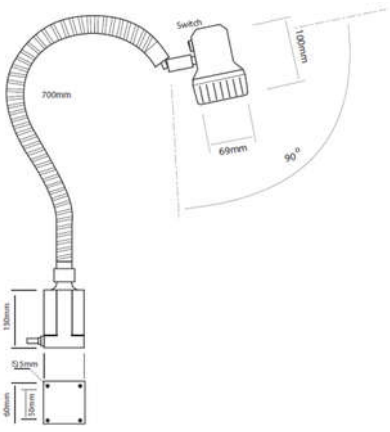

90° Swivel Integrated Driver

	Dimensions				Materials	Finishes
Base	*Length: 63 mm 180mm*	Width: 63 mm 180 mm	Height: 82 Or 135 mm 150 mm		ABS + 1% GF	Black
Flexible Arm	*Length*	*500/700 mm*	Diameter	13 mm	Flexible Plastic Sleeved Metal	Black
Head	*Length*	*100mm*	Diameter	69 mm	ABS + 1% GF	Black
Swivel	*Length*	*35 mm*	Diameter	13 mm	Steel	Chrome

DISCLAIMER. All product information provided is, to the best of Serious Brands knowledge, accurate as of the date of publication. When ordering, refer to www.seriouslights.co.uk for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Serious Brands terms and conditions of sale; and (c) the relevant product warranty. To the extent that any contract is deemed formed between Serious Brands and the purchaser of Serious Brands products and/or an end-user, versions of documents available at www.seriouslights.co.uk as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.seriouslights.co.uk the latter shall prevail.

Alex Range Other Choices

Alex (IP20)

Product	Swivel	Arm Length		Base Dimension		Driver	Input Voltage
761001	90 ˚	500 mm		Diameter:180mm		Plug in	100-240 V
69241/2	90 ˚	700 mm	Width:63 mm	Length:63 mm	Height:82 mm	None	12-24 V
69241/3	90 ˚	700 mm	Width:63 mm	Length:63 mm	Height:82 mm	Plug in	100-240 V
69231	90 ˚	700 mm	Width:63 mm	Length:63 mm	Height:135 mm	Integral	100-240 V

Alex Range Mounting Accessories Dimensions (mm):

Magnetic Base



Part No. 12010 or 14000

C-Clamp

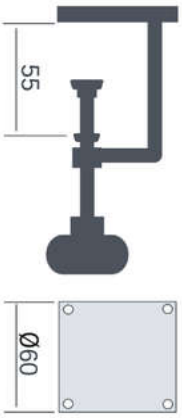

Part No. 14020

Table Base



Part No. 14035

Wall Mount

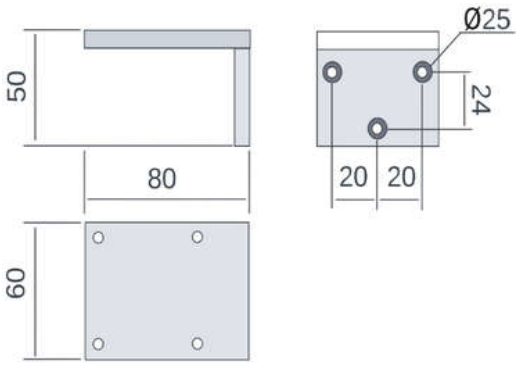

Part No. 14030

Notes:

- The Lightsource is removable from the luminaire
- All lights are equipped with a rocker on/off switch.
- To dim the light Press and hold the rocker push button (switch) until you reach the desired brightness.
- For lights with integrated drivers, the driver is integrated inside the luminaire and cannot be replaced by end user.
- Lights with no drivers 12-24 V driver should be connected to a Serious driver and never connect them to the main voltage.
- Accessories are not available on the table model.

DISCLAIMER. All product information provided is, to the best of Serious Brands knowledge, accurate as of the date of publication. When ordering, refer to www.seriouslights.co.uk for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Serious Brands terms and conditions of sale; and (c) the relevant product warranty. To the extent that any contract is deemed formed between Serious Brands and the purchaser of Serious Brands products and/or an end-user, versions of documents available at www.seriouslights.co.uk as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.seriouslights.co.uk the latter shall prevail.