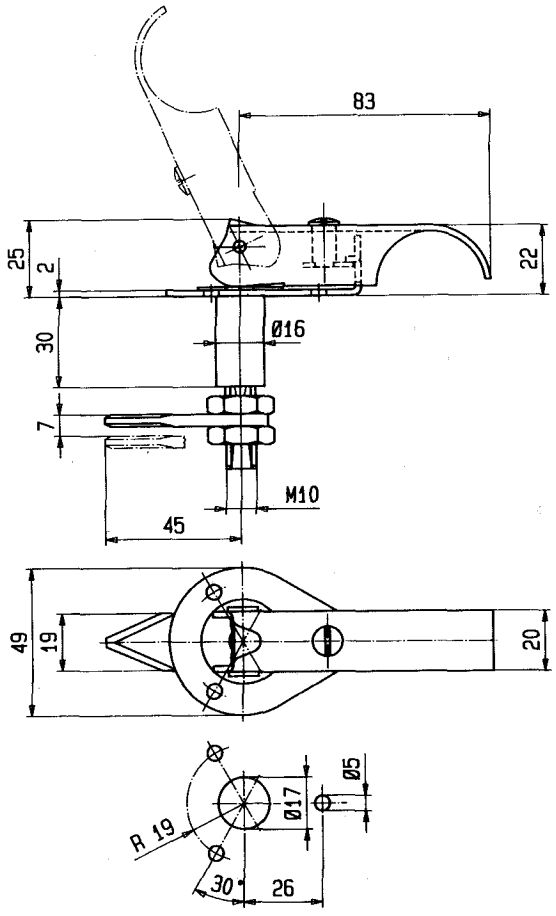


Lift- and Turn Latch
Steel, zinc and passivate

for double walled doors, to fix with blind rivets,
setting range for the tongue 25 mm each shaft length,
width 7 mm, turnable 4 x 90°


a) unlockable
b) with locking system formed as T - screw

panel thickness from - up to mm		No.
37 - 60	unlockable	**0.28.0500.0**
	lockable	**0.28.0510.0**
55 - 80	unlockable	**0.28.0502.0**
	lockable	**0.28.0512.0**
75 - 100	unlockable	**0.28.0504.0**
	lockable	**0.28.0514.0**
95 - 120	unlockable	**0.28.0506.0**
	lockable	***0.28.0516.0***

The locks will be delivered with straight tongue.
Further tongues see page 41.

Rust proof variants as special execution with economic ordering quantities.

panel hole preparation

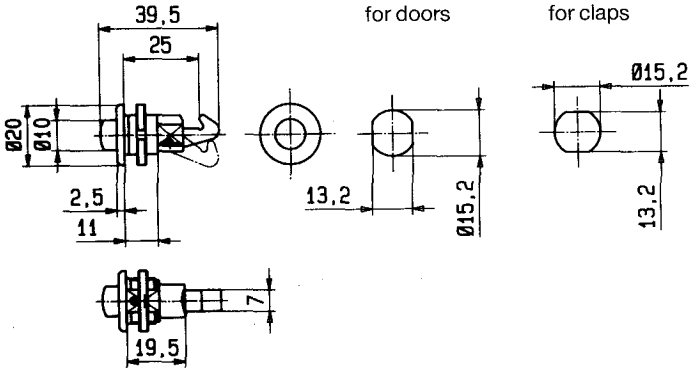


Snap-in latch

Zinc die-cast/ chrome plated

No.

0.32.0642.0

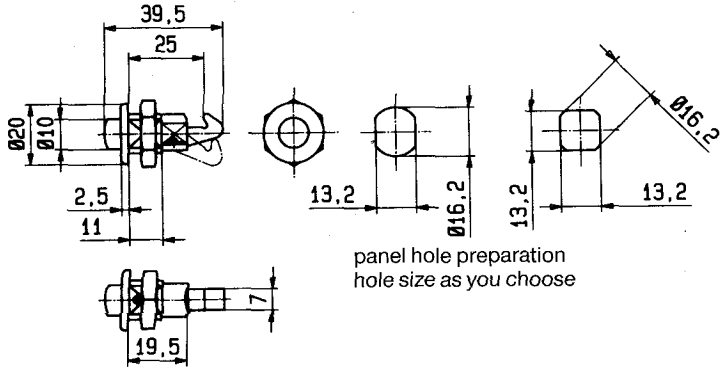

panel hole preparation
hole size as you choose

Snap-in latch

Strong version
Zinc die-cast/ chrome plated

No.

0.32.0641.0