
REF : RG 59 BU

75 O coaxial cable – based on MIL-C-17G

Ed. 6 06/07 SL

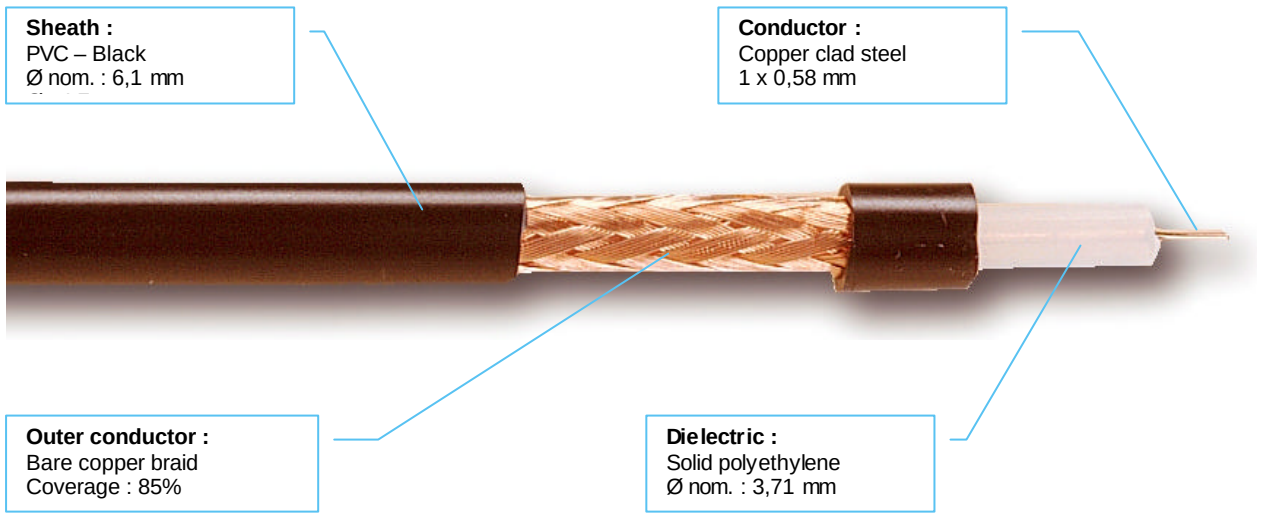

PRODUCTS INFORMATIONS

Application

These cables are used for signal transmissions, in analogical video and video surveillance applications.

Electrical properties

Characteristic impedance at 200 MHz : **75 O**

Nominal capacity (800 Hz – 1 KHz) : **67 pF/m**

Insulation resistance at 20°C : **> 5000 MO.km**

Dielectric strength at 50Hz : **> 5000 V**

Electrical resistance – inner conductor : **< 238 O/km**

Velocity of propagation : **66 %**

Nominal attenuation :

F (MHz)	dB/100m
400	24
1000	41

Characteristics

Temperature range : **- 10°C → + 70°C**

Minimum bending radius : **60 mm**

Weight : **57 kg/km**

According to RoHS Standard

This document is confidential, and is the property of CAE Groupe. CAE Groupe own the copyright, and the document must not be copied or changed in any form, wholly or in part without written permission from CAE Groupe. The contents of this document must be disclosed to any other person or persons.
The characteristics related to this document are not contractual, and can be modified without warning.