
prevost
Compressed Air Expert

PREVOST FILTRATION - UNIT COMBINATIONS

Filter-regulator-lubricator - 2 units
with safety quick coupling PREVOS1



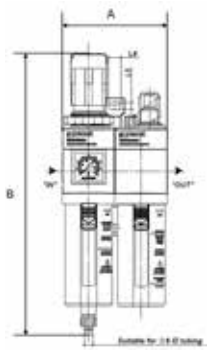

Max. operating pressure	Filtration (µm)	Min. / Max temperature
10 bar	25	5 / 50 °C

Part number	Female thread		Profile	Net weight (Kg)	Dim. A (mm)	Dim. B (mm)
ATU B2585102IS	G3/8	2 / 8.5	ISO 6150B	2.2	97	302
ATU B2585103IS	G1/2	2 / 8.5	ISO 6150B	2.2	97	302
ATU B2585102ES	G3/8	2 / 8.5	EUROPEAN	2.2	97	302
ATU B2585103ES	G1/2	2 / 8.5	EUROPEAN	2.2	97	302
ATU B2585102BS	G 3/8		BRITISH	2.2	97	302
ATU B2585103BS	G 1/2		BRITISH	2.2	97	302
ATU B2585102CS	G3/8	2 / 8.5	ISO 6150C	2.2	97	302
ATU B2585103CS	G1/2	2 / 8.5	ISO 6150C	2.2	97	302