EMPTY ENCLOSURE

TK PC 2518-11-to



TK PC 2518-11-to

Empty enclosure

CUSTOMIZABLE

254 x 180 x 111 mm
Article number: 13050801

Empty enclosure - Industrial Quality -, base: glass fibre reinforced polycarbonate, grey, similar to RAL 7035, cover: polycarbonate, transparent

IP66 IK08 690V AC 1000V DC

Technical data

Measures

Width:	254 mm
Length:	180 mm
Height:	111 mm
Inner height:	97 mm

Material

Base:	Polycarbonate, glass-fibre reinforced, grey similar to RAL 7035
Cover:	Polycarbonate, transparent
Sealing:	Polyurethane
Cover screw:	Polyamide 6, fiber-glass reinforced

Other attributes

Certificates

Accessory

- MPS-KRI
- TK MPI-2518
- NS 35-216
- ASS-gro
- HBA
- TK ABL

Günther Spelsberg GmbH + Co. KG · Im Gewerbepark 1 · D-58579 Schalksmühle · Germany · Phone: +49 (0) 23 55 / 892-0 · Fax: +49 (0) 23 55 / 892-299

EMPTY ENCLOSURE

TK PC 2518-11-to

Ingress protection:	IP66 - acc. EN 60529 / DIN VDE 0470-1
Impact restistance:	IK08 acc. DIN EN 5012 / VDE 0470 Teil 100
Protection class:	II - isolate protection acc. VDE 0106
Rated insulation voltage AC:	690V V
Rated insulation voltage DC:	1000 V
Heavy metals-free:	Yes
PVC-free:	Yes
Silicone-free:	Yes
Fitted for outdoor application:	Yes
Weatherproof:	Yes
Combustion behaviour to UL:	V-2 nach UL 94
Combustion behaviour to VDE:	960°C acc. VDE 0471/ EN 60695
sealable:	Yes
Knockouts:	No

Environmental attributes

Ambient temperature (min.):	-35 °C
Ambient temperature (max.):	80 °C
Ambient temperature (24 h):	60 °C
Max. rel. humidity at 25° C (short Therm):	95%
Max. rel. humidity at 40° C:	50%

Günther Spelsberg GmbH + Co. KG · Im Gewerbepark 1 · D-58579 Schalksmühle · Germany · Phone: +49 (0) 23 55 / 892-0 · Fax: +49 (0) 23 55 / 892-299

EMPTY ENCLOSURE

TK PC 2518-11-to

Scale Drawing

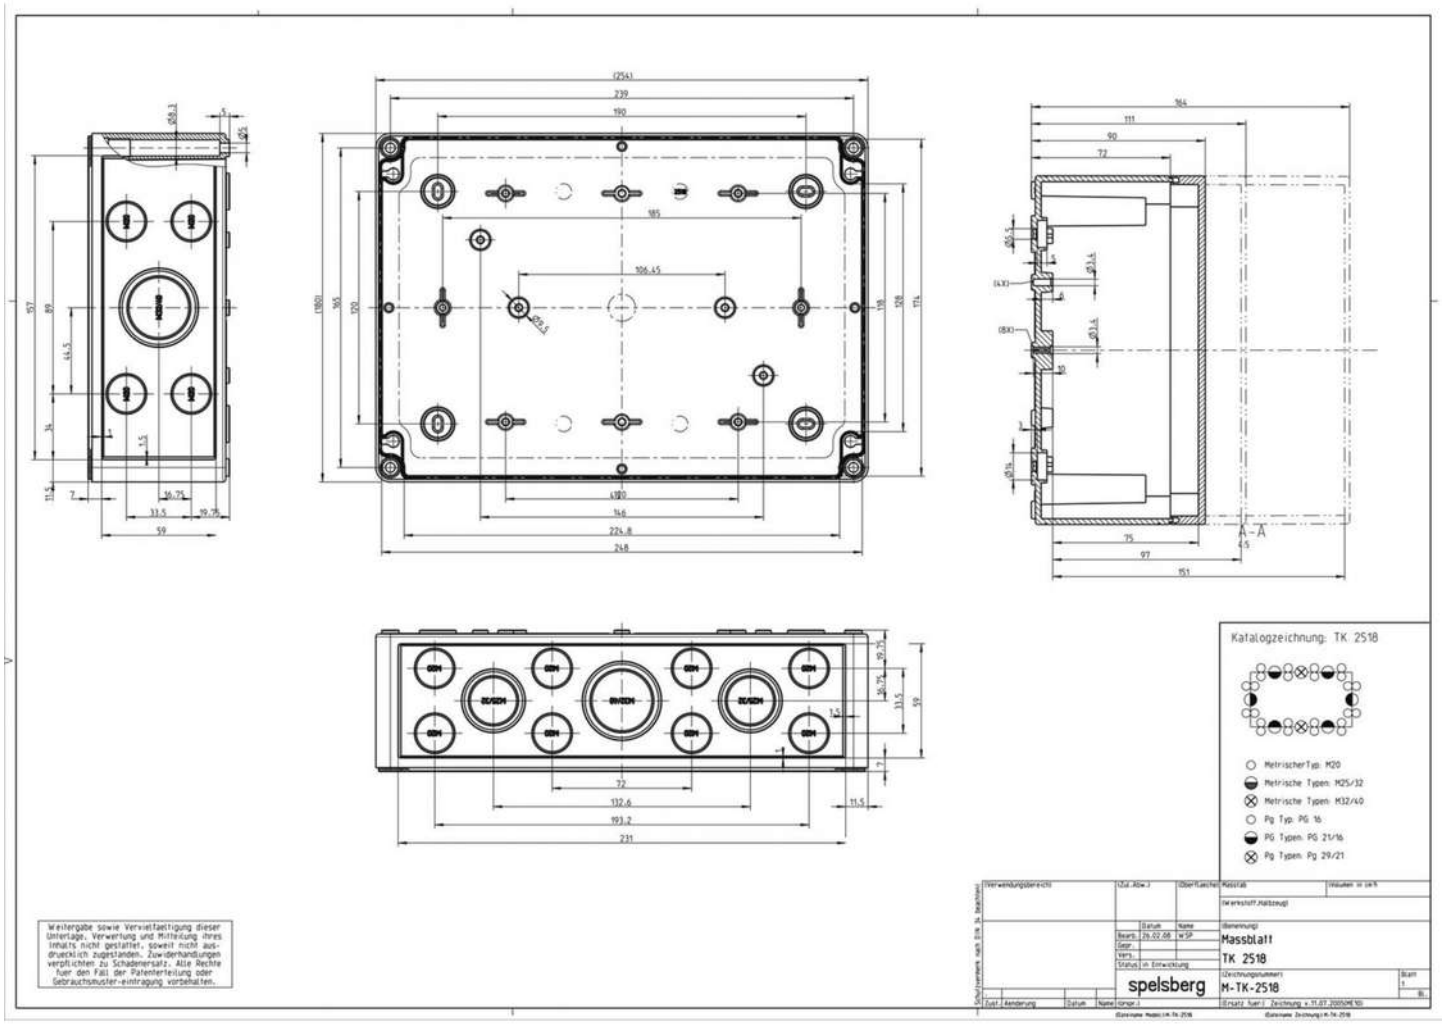

Günther Spelsberg GmbH + Co. KG · Im Gewerbepark 1 · D-58579 Schalksmühle · Germany · Phone: +49 (0) 23 55 / 892-0 · Fax: +49 (0) 23 55 / 892-299