


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/20/11	D.GRIFFIN
B	ECN 7158: UPDATED OVERMOLD DESIGN AND REVISED ROHS NOTE	11/14/13	D. DESJARDIN
C	ECN 10853; REVISE UL STYLE TO 21551,ADD LSZH CBL CHARACTERISTICS TO DWG,NEW FORMAT	12/22/2020	MBLACKWOOD




2X HDMI MALE
19 PIN CONNECTOR
GOLD PLATED CONTACTS

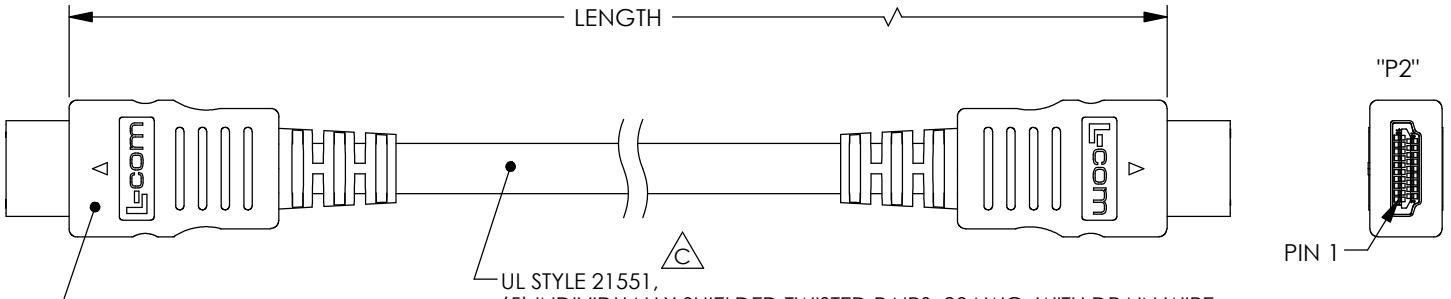

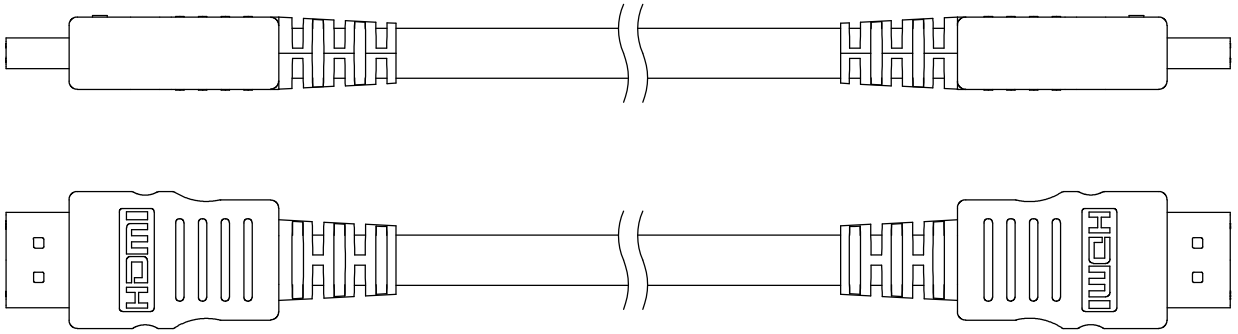

WIRE MAP

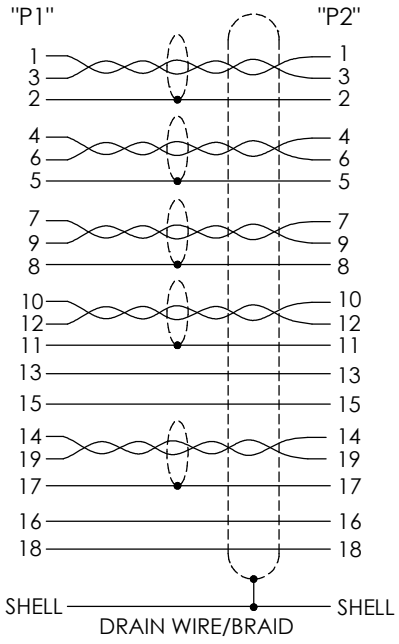

PART NUMBER	LENGTH	
	METERS	FEET
HDCAMMZ-0.5	0.5	1.64
HDCAMMZ-1	1.0	3.28
HDCAMMZ-2	2.0	6.56
HDCAMMZ-3	3.0	9.84
HDCAMMZ-4	4.0	13.12
HDCAMMZ-5	5.0	16.40

LSZH CABLE CHARACTERISTICS: C
FLAME RATING: IEC 60332-1
CORROSIVE GAS: IEC 60754
SMOKE EMISSION: IEC 61034

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY D. PARHAM	10/18/2011
CHECKED BY D. CASTRO	10/18/2011
APPROVED BY P. McNEIL	10/18/2011

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
AUDIO/VIDEO

PRODUCT DESCRIPTION
CA HDMI M-M LSZH

SIZE	CAGE CODE	DWG. NO.	REV.
A	43321	HDCAMMZ	C

SCALE: NONE | CAD FILE: HDCAMMZ.SLDDRW | SHEET 1 OF 1