MURR ELEKTRONIK
stay connected

M8 male straight / M8 female straight PUR-OB 3x0,25 black UL, CSA 0,6m

Male straight to female straight
M8 - M8, 3-pole

Image



Vicarious picture

Approvals

Express shipments

Form

	88001

Technical Data

Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Operating voltage	max. 60 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Locking of ports	Screw thread M8 × 1 mm (recommended torque = 0.6 Nm) self-securing
Temperature range	-25...+85 °C, depending on cable quality


All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/13

MURR ELEKTRONIK
stay connected


Cable	
No./diameter of wires	3 × 0.25 mm²
Wire isolation	PP (br, bl, bk)
C-track properties	5 Mio.
Jacket	PUR (UL/CSA)
Outer diameter	approx. 4.1 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+80 °C
Commercial data	
Net weight	22
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1
Comments	
	Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/13

Contact layout

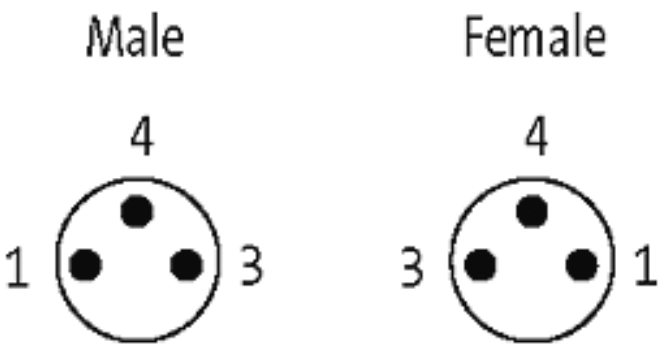

Circuit diagram

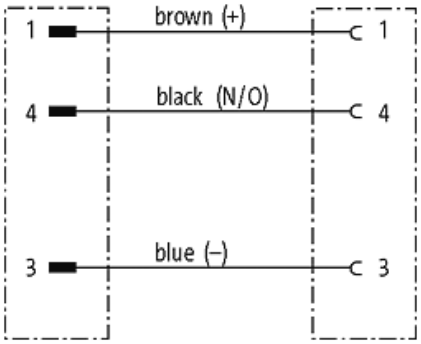

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/13