
DF1100

Power supply module for electronic circuit breaker

Fuse/Standard/24VDC/Module

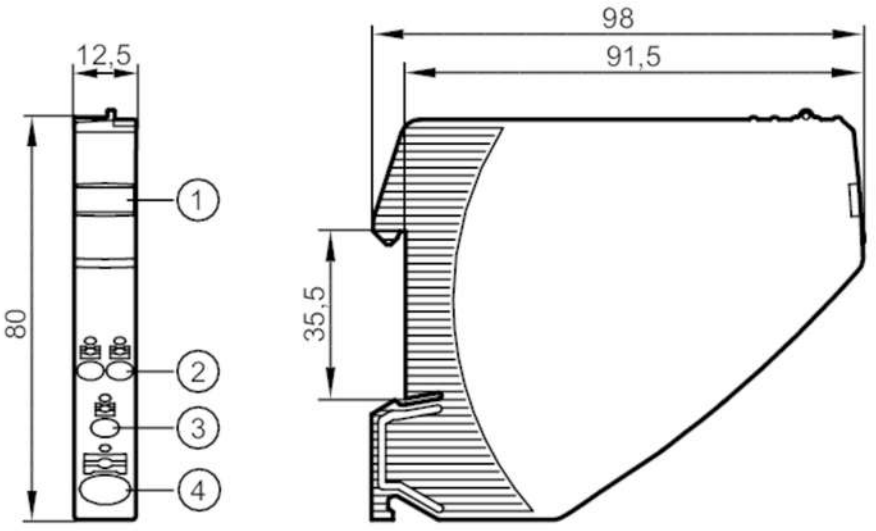

1 panel for labelling
2 push-in terminals switching output 13/14
3 push-in terminal 0 V
4 push-in terminal 24 V DC

Electrical data			
Operating voltage	[V]	to SELV/PELV	
Nominal voltage DC	[V]	24	
Input voltage DC	[V]	19.2...30	
Protection class		III	
Reverse polarity protection		yes	
Mains buffering time (nominal voltage 24 V DC)	[ms]	10	
Input current (nominal voltage 24 V DC)	[A]	40	
Closed-circuit current	[mA]	10	
Operating conditions			
Ambient temperature	[°C]	-25...60	
Storage temperature	[°C]	-40...70	
Protection		IP 20; (on the front)	
Pollution degree		2	
Tests / approvals			
EMC		EN 61000-6-3	radiation of interference
		EN 61000-6-2	immunity
Mechanical data			
Weight	[g]	67	
Dimensions	[mm]	80 x 12.5 x 98	
Electrical connection			
push-in terminals:			

DF1100

Power supply module for electronic circuit breaker

Fuse/Standard/24VDC/Module

contact lever/strip:

Connection

