RELECO by TURCK


S3-S

Three pole, two level, coding ring
Integrated clip and marking label


10 A 250 V




Wiring Diagram

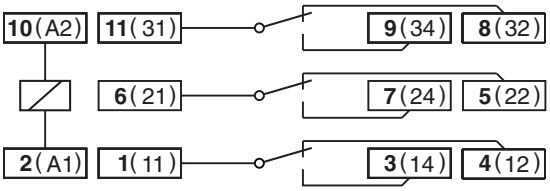

Dimensions - mm

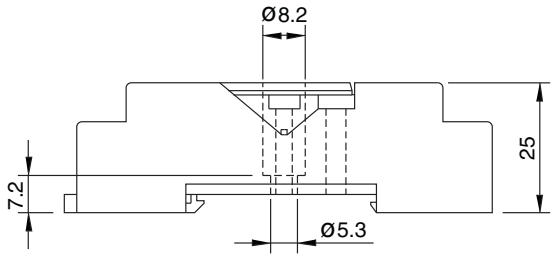

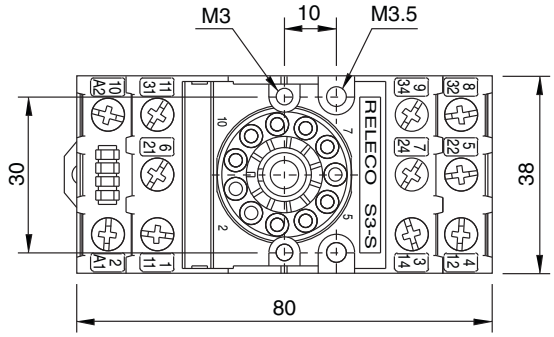

Socket for MRC, 11-Pin Plug-In Relay Types C3-A30, C3-G30, C3-T31, C3-X10, C3-M10, C3-R20, C3-E24, C3-N34

- Accepts the exclusive RELECO coding ring for coding both relay and socket.
- DIN rail or panel mountable
- Removable label
- EN/DIN and sequencial numbering

According to EN 60947-1 and IEC 61810-5

Specifications

Nominal Load:	10 A/250 V
Insulation:	
Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV
Wire In-Lets Capacity:	
Solid wire	4 mm² or 2 x 2.25 mm²
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm²
Max. screw torque	1. 2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	