optris CSmicro LT/LTH
TECHNICAL DATA

Very small infrared thermometer for –50 °C to 1030 °C



Features:

- Size: M12x1, 28 mm long, stainless steel housing
- Temperature range: –50 °C to 1030 °C
- Rugged coated silicon optics
- Usable up to 180 °C ambient temperature without cooling (LTH sensing head)
- Green LED alarm indication, aiming support, self diagnostic or temperature code indication
- Scalable analog output: 0 – 5/10 V or 4 – 20 mA (two-wire); additional simultaneous alarm output
- Easy programming via smartphone app (IR mobile) or Windows software (Compact Connect)

General specifications

Environmental rating	IP 65 (NEMA-4)
Ambient temperature	–20 ... 120 °C (LT sensing head) –20 ... 180 °C (LTH sensing head) –20 ... 80 °C (electronics) –20 ... 75 °C (electronics / mA version)[1)]
Storage temperature	–40 ... 85 °C (sensing head and electronics)
Relative humidity	10 – 95 %, non condensing
Vibration	IEC 60068-2-6 (sinus shaped) IEC 60068-2-64 (broadband noise)
Shock	IEC 60068-2-27 (25G and 50G)
Weight	42 g

Electrical specifications

Output / analog	0 – 5 or 10 V or 4 – 20 mA
Output / alarm	0 – 30 V / 50 mA (open collector) (mA version: 500 mA)
Output / digital	Uni-/ bidirectional, 9.6 kBaud, 0/3 V digital level, USB optional
LED functions	Alarm indication, automatic aiming support, self diagnostic, temperature indication (via temp.code)
Input (0 – 10 V)	Programmable functional input for external emissivity setting[2)] / ambient temperature adjustment[2)], triggered signal output or peak-hold function
Cable length head – electronics: after electronics:	 0.5 m (standard), 3 m, 6 m 0.5 m (standard), 3 m, 6 m
Power supply	5 – 30 V DC
Current draw	9 mA (mV version)

Measurement specifications

Temperature range (scalable via software)	–50 ... 1030 °C
Spectral range	8 – 14 µm
Optical resolution (90 % energy)	22:1 (LT22H) 15:1 (LT15 / LT15H) 2:1 (LT02)
CF lens (optional)	2.3 mm @ 50 mm (22:1) 3.4 mm @ 50 mm (15:1) 2.5 mm @ 23 mm (2:1 with CF optics)
System accuracy	±1.0 % or ±1.0 °C[3), 4)]
Repeatability	±0.5 % or ±0.5 °C[3), 4)]
Temperature coefficient	±0.05 K/K or ±0.05 %/K[5)]
NETD	50 mK[6)]
Response time (90 %)	14 ms (LT) / 150 ms (LTH)
Emissivity / Gain (adjustable via 0 – 5 V DC input or soft-ware)	0.100 – 1.100
Transmissivity (adjustable via software)	0.100 – 1.100
Signal processing (parameter adjustable via software)	Peak hold, valley hold, average; extended hold function with threshold and hysteresis
Dimensions of electronics	Length: 35 mm Diameter: 12 mm
Software	optris® Compact Connect (Windows) IR mobile (Android)

[1)] mA version: For Vcc (supply voltage) 5 – 12 V DC/ the electronic's max. ambient temperature is 65 °C at Vcc >12 V DC

[2)] mV version only

[3)] Object temperature >23 °C; whichever is greater

[4)] At ambient temperature 23 ±5 °C

[5)] At ambient temperatures <18 °C and >28 °C; whichever is greater

[6)] At time constant of 200 ms and T_{Obj} 200 °C

Optris GmbH · Ferdinand-Buisson-Str. 14 · 13127 Berlin · Germany
Phone: +49 30 500 197-0 · Fax: +49 30 500 197-10 · E-mail: sales@optris.global · www.optris.global

optris CSmicro LT / LTH

Optical parameters

SF optics, D:S = 2:1

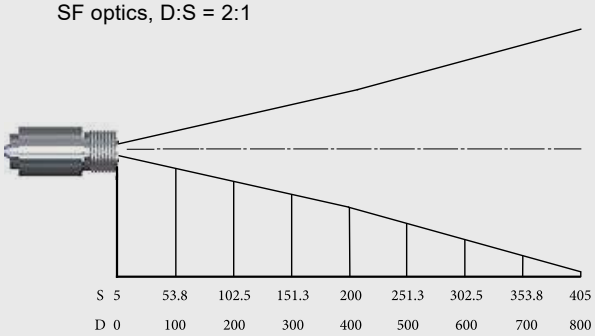

CF optics D:S = 2:1 (far field = 2,5:1)

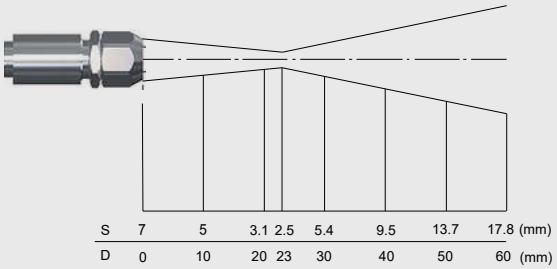

Options with integrated CF lens

SF optics, D:S = 15:1

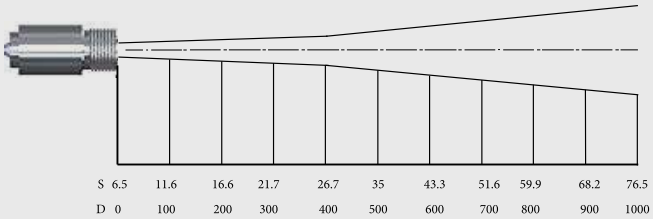

CF optics D:S = 15:1 (far field = 5:1)

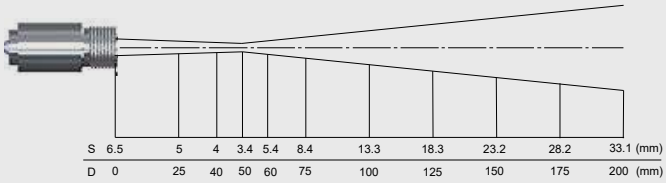

SF optics D:S = 22:1

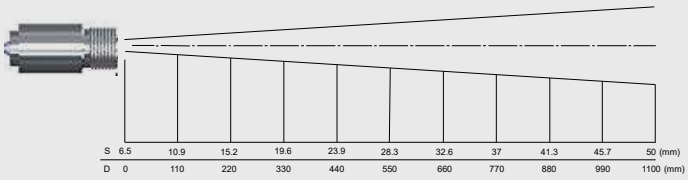

CF optics, D:S = 22:1 (far field = 6:1)

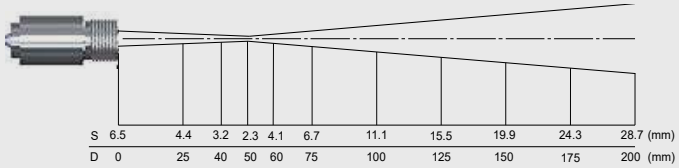

Connections

Connection mV version

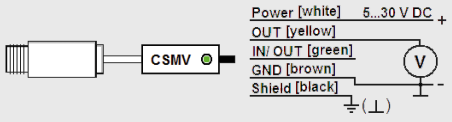

Connection mA version





The CSmicro can be connected to a smartphone via the IR app connector

GET IT ON Google Play

Dimensions

Dimensions CSmicro



Mounting bracket, fixed (ACCTFB)



Air purge with integrated CF optics (ACCTAPLCF)



Specifications are subject to change without further notice · CSmicroLT LTH-DS-EN2019-04-B