S3-S

Socket for 11-pin standard relay according to IEC 67-I-18b

Type	**S3-S** 3-pole, 2 connection level Coding ring optional Integrated retaining clip and labelling space
Rated current	**10 A**

Specifications	
Rated load	10 A / 250 V
Insulation	Test voltage V rms / 1 min
– All terminals/DIN rail	2,5 kV
– Terminal/terminal	2,5 kV
Cross-section of connecting wire	
– Single-wire	4 mm^2 or 2 x 2,5 mm^2
– Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Screw dimensions	M3, Pozi, slot
Integrated retaining clip/plastic	for relay series C3
Labelling space	detachable
Connection label	1...11; DIN/EN
Mounting	DIN rail T35 or mounting plate
Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Weight	69g


Associated, plug-in 11-pin MRC relays	**C3-A, C3-G, C3-T, C3-X, C3-M, C3-R, C3-E, C3-N, C3-S**
Suitable for holding the Releco coding ring	
For coding the relay and the socket.	

DIN rail or panel mounting. Removable label.
EN /DIN and sequencial numbering. According to EN 60947.1 and IEC 61810.1


Accessories	
Coding ring, Set red:	**S3-BC** Packaging unit: 5 pcs
Retaining spring, steel	**S3-C, S3-CT** (with Timecube)
Retaining clip, plastic	**CP-15B**




Connection diagram

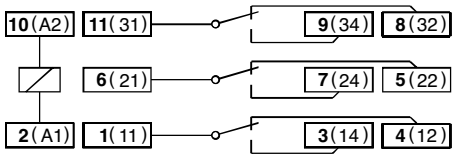

Dimensions [mm]

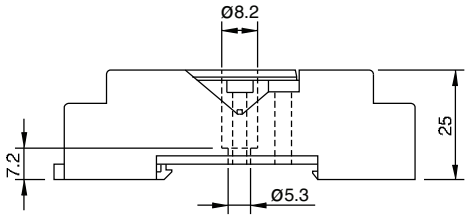

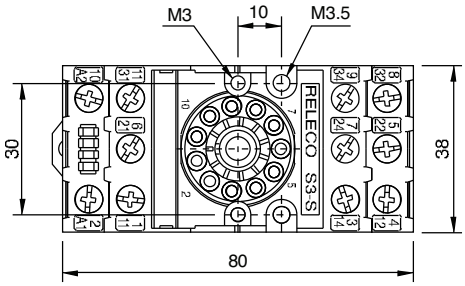

Technical approvals, conformities

EN 60947-1, EN 61810-1

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.