

C2 Compression Latch

Lever latch

- **Low profile when latched**
- **Easy grip adjustment**
- **Push button actuation**

Material and Finish

Zinc alloy, powder coated or chrome plated and steel, zinc plated

Performance Details

Max. static load: 200 N (45 lbf)

Installation Notes

* Serrated Mounting Screw M5 x 16. For door thickness greater than 5 (.20) calculate screw length using the following formula: Door thickness + 12 (.47)

Keys

See page 58


Accessories


Rubber Bumper:
Part Number: C2-25-301-82




Keys

See page 58

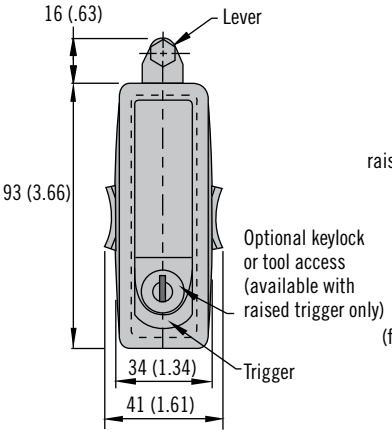

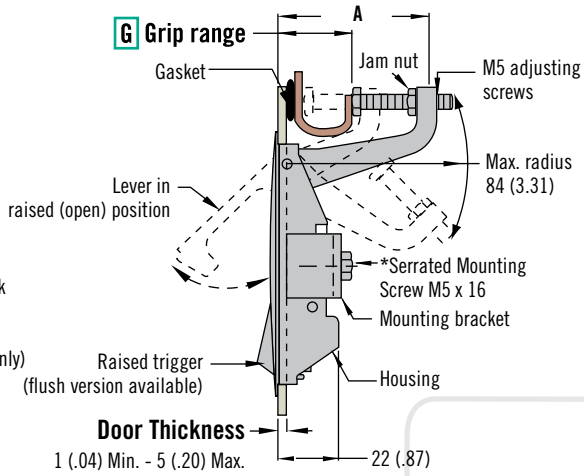

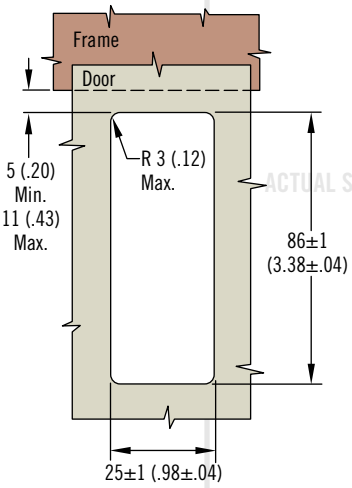

ACTUAL SIZE

L Lock Styles



Key-locking keyed CH751 | 4 (.16) Hex recess | No2 Phillips recess | 7mm (.27) recess | Rail Standard

Part Number Selection

L Lock style
- **1** Non-locking raised trigger
- **2** Key-locking raised trigger keyed CH751 (two flat keys supplied)
- **3** Flush trigger non-locking
- **4** 4 (.16) Hex recess raised trigger
- **10** No. 2 Phillips raised trigger
- **11** 7mm Square
- **13** Locking without lock core (see pages 182 - 183 for lock core options)
- **14** Railway standard

C2 - 3 G - L F - P

F Finish
- **1** Textured chrome
- **5** Black powder coated

P Packaging option
- **3** Latches are sold layer packed. Omit for individually packaged latches.

G Grip Range		A
2	1 - 24 (.04 - .95)	35 (1.38)
3	23 - 46 (.91 - 1.81)	57 (2.24)

Notes

For lock core selection and a complete overview of the *SOUTHCO®* Key-Choice System see pages 182 - 183

Dimensions in millimeters (inch) unless otherwise stated