MOSA 7/8" MALE 0° FIELD-WIREABLE (IDC)


5-pol., 0,75-1,50mm²

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product


Illustration



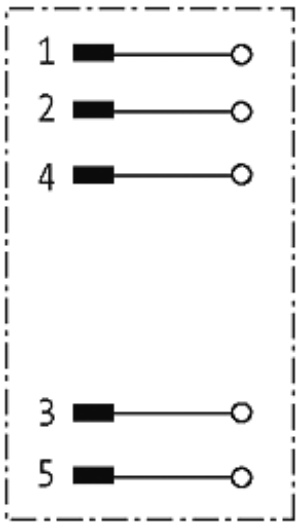

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

MURR ELEKTRONIK
stay connected

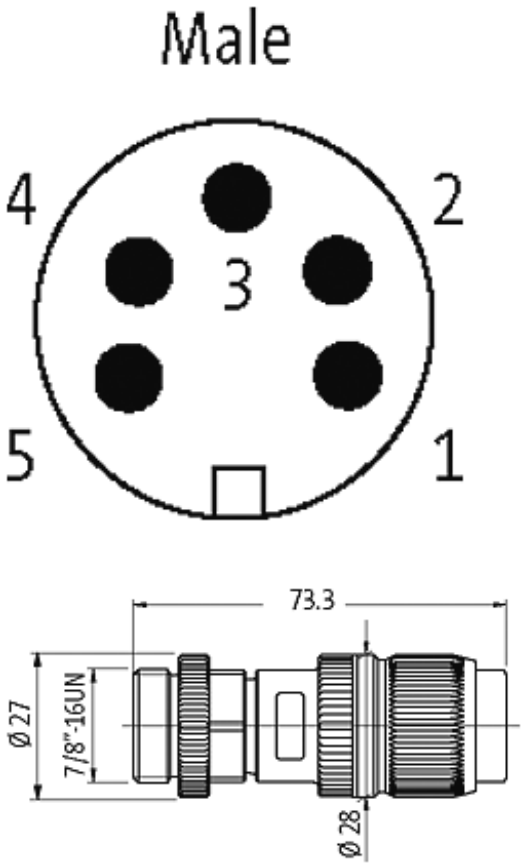

Product may differ from Image

Form	
Form	78091
Technical Data	
Operating voltage	max. 230/400 V AC/DC
Rated surge voltage	4 kV
Operating current per contact	max. 10 A
Material group	IEC 60664-1, category I
Connection cross section	0.75...1.5 mm² (conductor diameter min. 0.15 mm)
Coding	A-coded, 5-pole
Sealing range (cable Ø)	6.8...9.5 mm
Wire isolation	PVC, PP, TPE
Outer wire Ø	max. 2.8 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	Brass
General data	
Pollution Degree	3
Temperature range	-40...+85 °C
Commercial data	
country of origin	DE

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

customs tariff number	85366990
EAN	4048879134774
eClass	27279221
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com