# rotronic

**Datenblatt - Fiche technique - Data sheet**

**11.04.5646**



## ROLINE Gold DisplayPort Kabel, DP ST – ST, 3,0m

## ROLINE Gold Câble DisplayPort DP M – DP M, 3,0m

## ROLINE Gold DisplayPort Cable, DP M – DP M, 3 m

# ROHS-COMPLIANT

| LTR | REV. | DESCRIPTION | DATE |
|---|---|---|---|
| | | | |

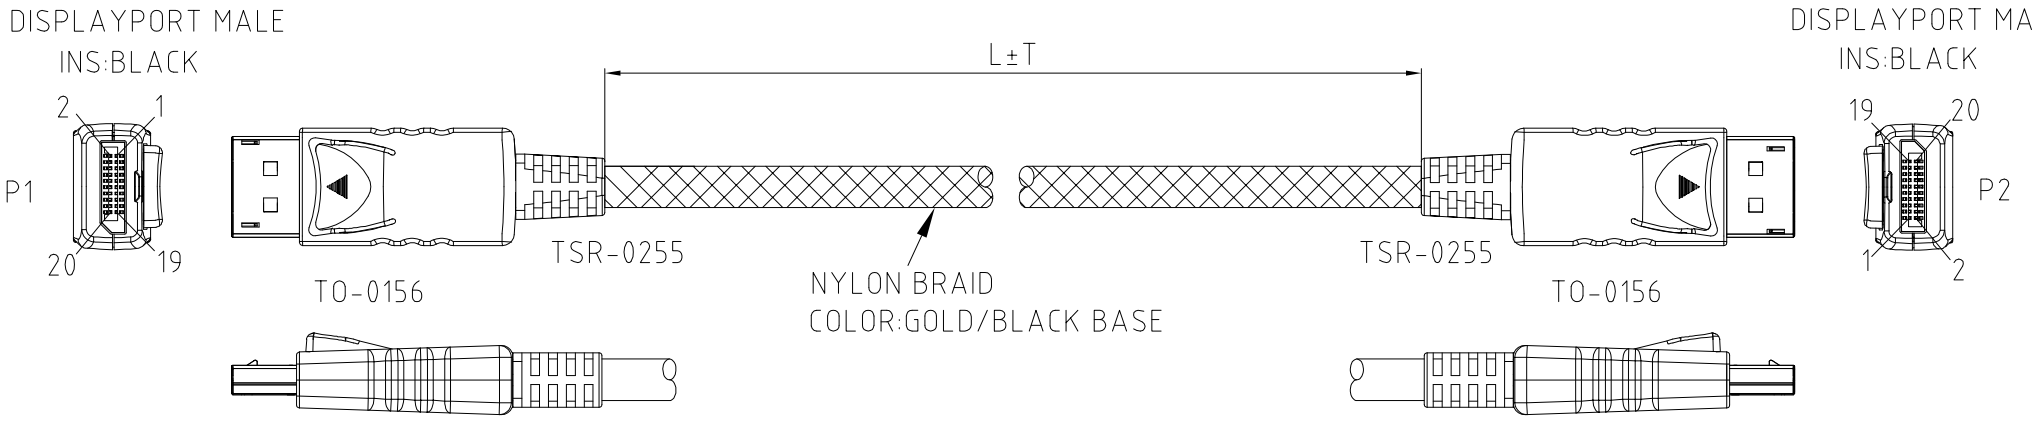


NOTE:

1.CABLE: UL-20276 [#30(7/0.1 T.C)×1P INS:FOAM-PE+D.W(7/0.1 T.C)+AL/MY
+Hot-melt Mylar]×5C + #30(7/0.1 T.C)×4C INS:Polyethylene+AL/MY+
B.D(85%) PVC JACKET; OD:6.5±0.2mm COLOR:MATT BLACK(NK-K01) .

2.CONNECTOR:
P1 & P2: DISPLAYPORT 20P MALE W/PCB & LATCH CONTACT:15u"
GOLD PLATED SHELL.

3.SHIELD:INNER MOLD MUST BE WRAPPED COPPER TO CONNECTOR SHELL & CABLE BRAID

4.HOOD:ASS'Y TYPE, PLASTIC HOOD COLOR: GOLD

5.ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohm Max .
(3)INSULATION RESISTANCE 10M ohm Min .

6.PACKING: EACH PC / POLYBAG+BIG HEADER CARD+BAR CODE LABEL.

| DWG | P/N | L(mm) | T(mm) | PCS/INNER CARTON | PCS/CARTON |
|---|---|---|---|---|---|
| 200-1484-3 | 11.04.5647-5 | 5000 | 50 | 5 | 10 |
| 200-1484-2 | 11.04.5646-10 | 3000 | 30 | 10 | 20 |
| 200-1484-1 | 11.04.5645-10 | 2000 | 30 | 10 | 20 |

| Tolerance | Inch | M/M |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

Draw: FANNIE 12/13/10'
Chek:
Engr:

**Rotronic co., LTD.**

Title: DISPLAYPORT ASS'Y CABLE
Customer P/N:
App'd:
Customer: T-RAG
Scale: NONE | Units: M/M | Third Angle Projection
Dwg No. 200-1484 | REV:A | Sheet: 1/2

| LTR | REV. | DESCRIPTION | DATE |
|---|---|---|---|
| | | | |

## PIN OUT

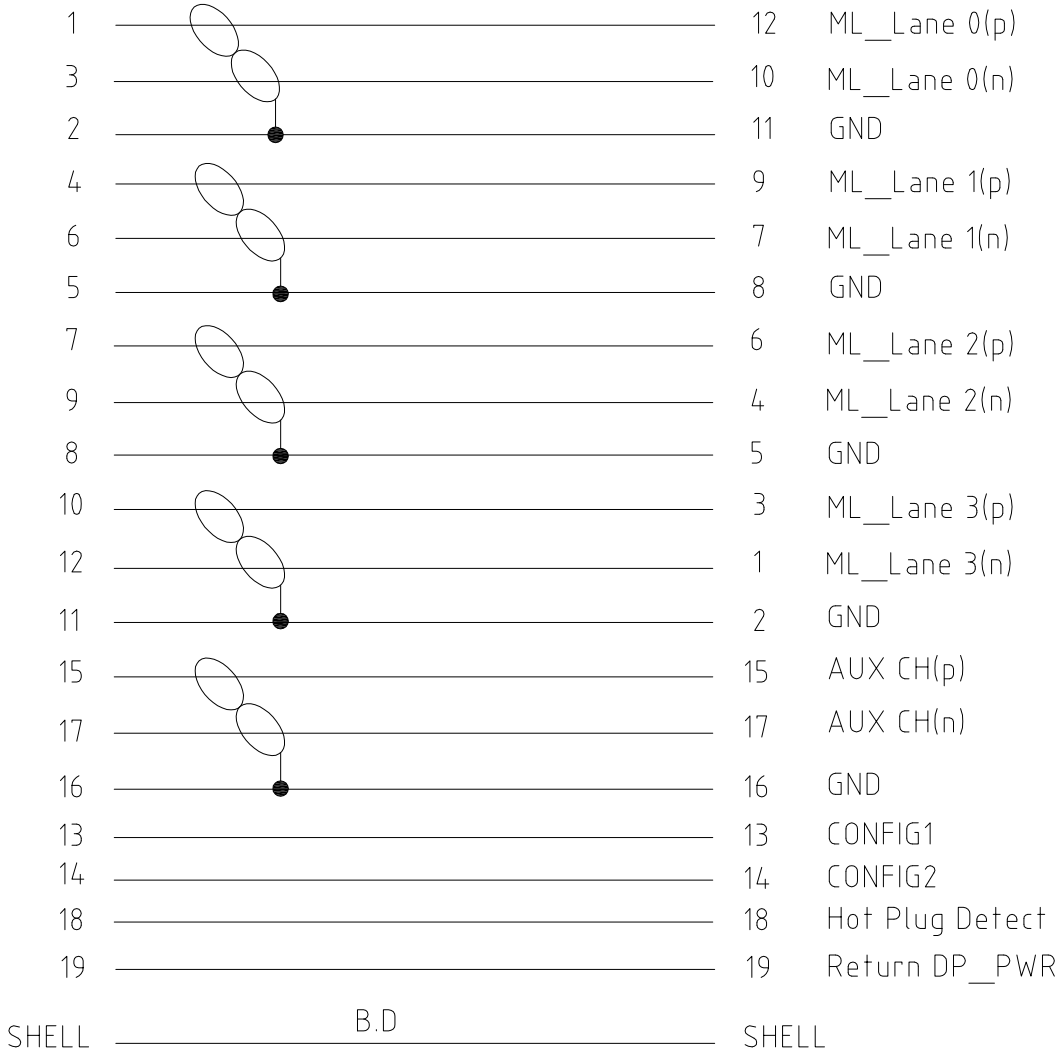


| Tolerance | Inch | M/M |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

Draw: FANNIE 12/13/10'

Chek

Engr

**Rotronic co., LTD.**

Title: DISPLAYPORT ASS'Y CABLE

Customer P/N

App'd

Customer: T-RAG

Scale: NONE | Units: M/M | Third Angle Projection

Dwg No. 200-1484 | REV:A | Sheet. 2/2