

2-Port Dual Monitor DisplayPort KVM Switch

TK-240DP (v1.0R)

- Dual Monitor DisplayPort™ 1.2 KVM
- Designed for use with Dual DisplayPort systems
- 3.5mm speaker and microphone connections
- Supports 4K UHD resolutions up to 3840 x 2160
- 2-Port USB 2.0 hub for storage devices and printers
- Required cabling (TK-CP06) sold separately
- No CD installation required

TRENDnet's 2-Port Dual Monitor DisplayPort KVM Switch, model TK-240DP, allows you to control two computers with one set of console controls. Experience up to 4K UHD resolutions, no driver installation required. The TK-240DP is designed for dual monitor systems with USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or printers between computers.

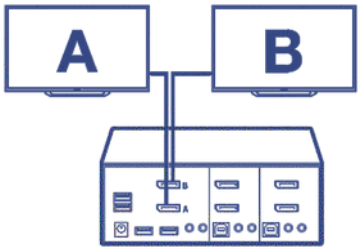

DisplayPort Monitor
Designed to connect to two DisplayPort monitors



4K UHD Resolution
Supports resolutions up to 4K UHD (3840 x 2160)



USB 2.0 Hub
Two additional USB ports to connect storage devices and printers.

Networking Solution

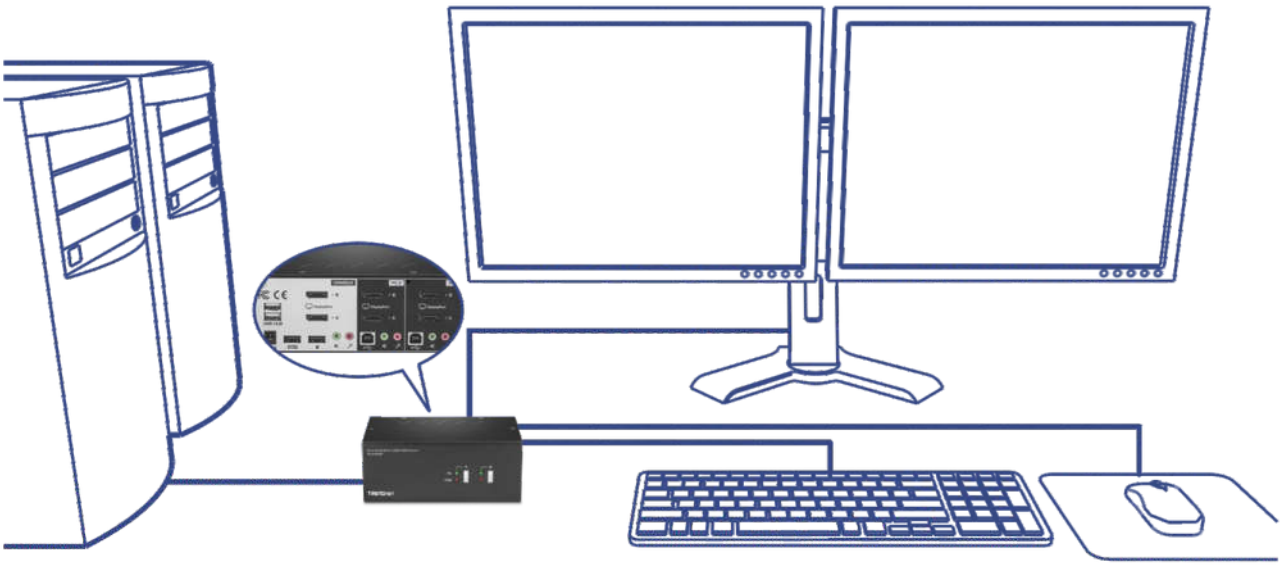

Computers
Control up to 2 computers

USB Mouse & Keyboard
True Transparent USB (TTU) emulation technology supports most keyboard and mouse designs

USB 2.0 Hub
Two additional USB ports to connect storage devices and printers

4K UHD
Supports resolutions up to 4K UHD (3840 x 2160)

DisplayPort Monitor
Designed to connect to two DisplayPort monitors

Hot Keys
Hot Key command shortcuts

Audio Support
Full audio support maximizes work station productivity

Housing
Rugged metal enclosure

Specifications

Console Port Connectors	• Keyboard: USB Type A • Mouse: USB Type A • Monitors: 2 x DisplayPort 1.2 • 2-port USB 2.0 Hub • Speaker jack: 3.5 mm • Microphone jack: 3.5 mm
KVM Port Interface (up to 2)	• Keyboard/Mouse: USB Type B • Monitors: 2 x DisplayPort 1.2 • Speaker jack: 3.5 mm • Microphone jack: 3.5 mm
Computer Interface (up to 2)	• Keyboard/Mouse: USB Type A • Monitors: 2 x DisplayPort 1.2 • Speaker jack: 3.5mm • Microphone jack: 3.5mm
Monitor Resolution	• Up to 3840 x 2160
Switching Control	• Front panel push buttons • Keyboard hot key commands
Operating Temperature	• 0° – 40° C (32° – 104° F)
Operating Humidity	• Max. 90 % non-condensing

Power	• Input: 100 - 240V AC, 50/60Hz, 0.8A • Output: 9V DC, 2A external power adapter • Max. consumption: 0.7W
Dimensions	• 163 x 100 x 66 mm (6.4 x 3.9 x 2.6 in.)
Weight	• 750g (1.65 lbs.)
Certifications	• CE • FCC
Warranty	• 2 year

PACKAGE CONTENTS

- TK-240DP
- Quick Installation Guide
- Power adapter (9V DC, 2A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

20675 Manhattan Place • Torrance • CA 90501 • USA • T: 1-888-326-6061 • F: 1-310-961-5511 • sales@trendnet.com • www.TRENDnet.com

is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subjectto change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.

Updated: 03/11/2019