Brand of NTN corporation

Technical data

UCT311

Bearing units




Grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

KIT CONTENT

UC.311.G2, T311

VISUAL (S)

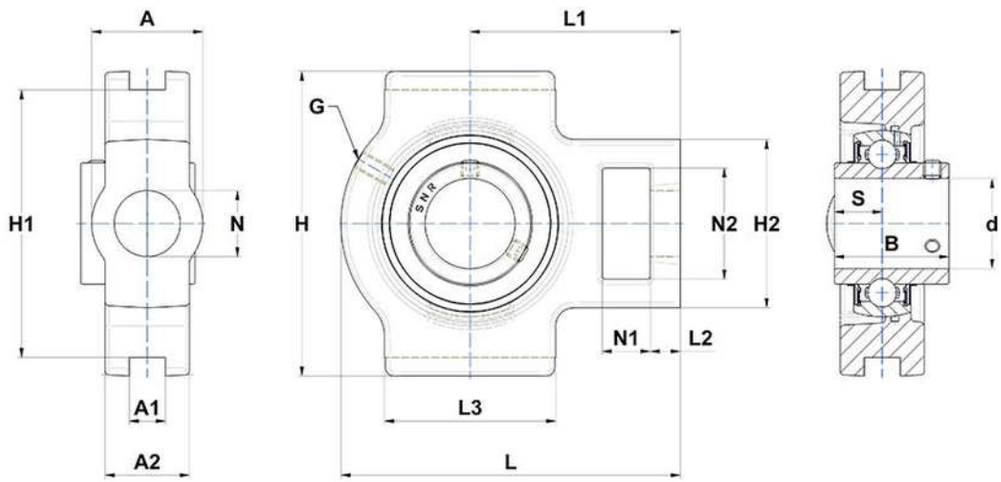

PRODUCT DEFINITION

Brand	SNR
A - Housing width	66 mm
A1 - Width of location slot	22 mm
A2	44 mm
B - Width of Inner Ring	66 mm
d - Shaft diameter	55 mm

NTN Europe
1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
G - Grease fitting	M6x1
H - Housing length, width or diameter	163 mm
H1 - Distance between location slots	150 mm
H2 - Housing height / width	105 mm
L - Housing length	207 mm
L1 - Distance attachment end face to bearing centerline	127 mm
L2 - Thickness of attachment end	23 mm
L3 - Length of guidance slot/face	115 mm
N - Mounting hole dimension	39 mm
N1 - Length of attachment slot	29 mm
N2 - Height of attachment slot	66 mm
S - Distance front side/bearing centre	25 mm

PRODUCT PERFORMANCE	
C - Dynamic load rating	71600000 mN
C0 - Static load rating	44800000 mN
Operating temperature min.	253,15 °K
Operating temperature max.	373,15 °K

OTHER FEATURES	
Mass	6,37 kg
Recommended tightening torque for set screw	22 N-m