Technical Specifications

Miller® Kernmantel forked restraint lanyards

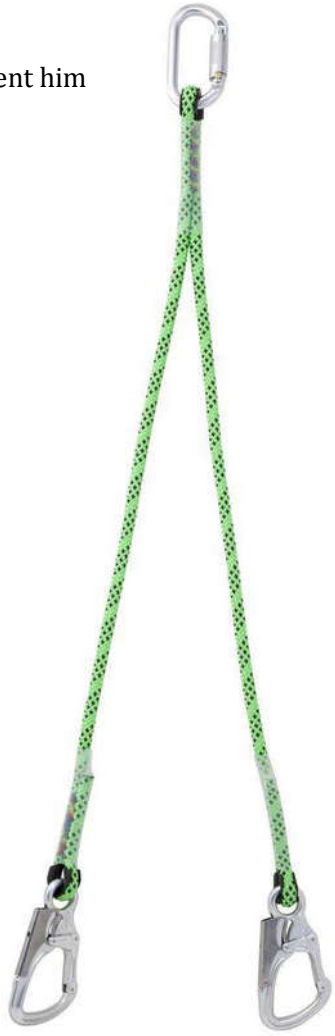

Description:

Restraint lanyards are used to restrict the worker's movement to prevent him reaching a location where a fall hazard exists.

Features and Benefits:

Material :
Kernmantel ∅11mm
Sheath: Polyester
Core: Polyamide

Lanyard :
Breaking strength of the rope : > 22 kN
EN 354
EN 358 : 1999
Temperature of use : -30°C à +50°C

- The Kernmantel rope is 2 times more resistant to the abrasion than the other standard ropes.

New design:

- The new kernmantel lanyards are manufactured with a light green rope with black stripes, which are highly visible from a distance increasing safety at work.
- The stitches are highly visible which facilitates the safety check before use.

LAW of 19 MARCH 93

PPE are products classified in category III, mortal risks, and as such they have to be the object of a periodic inspection for less than twelve months at the time of its use by the qualified person.

For more information, please contact our technical team at 02 48 52 40 42 or by e-mail techniserv.hsp@honeywell.com

HONEYWELL FALL PROTECTION FRANCE SAS
35-37 rue de la Bidauderie
F - 18100 Vierzon - France
Tel : +33 2 48 52 40 40
Fax : +33 2 48 71 04 97
Web site : www.honeywellsafety.com

A wide range of products for every worker's situation:

This new range of Miller kernmantel restraint lanyards offers a large choice ensuring there is an option for each work situation .

References	Designation	User connector	Anchorage connector	Weight
1032348	Restraint lanyard Y kern. 0,8m	Thimbles		0,220kG
1032349	Restraint lanyard Y kern. 1,3m			0,302Kg
1032350	Restraint lanyard Y kern. 1,8m			0,390Kg
1032351	Restraint lanyard Y kern. 1m +Q.T steel 17mm +2GO55 steel 55mm			1,430Kg
1032352	Restraint lanyard Y kern. 1.5m +Q.T steel 17mm +2GO55 steel 55mm			1,520Kg
1032353	Restraint lanyard Y kern. 2m +Q.T steel 17mm +2GO55 steel 55mm			1,600Kg
1032354	Restraint lanyard Y kern. 1m +Q.T alu. 17mm +2GO60 aluminium 60mm			0,799Kg
1032355	Restraint lanyard Y kern. 1.5m +Q.T alu. 17mm +2GO60 aluminium 60mm			0,880Kg
1032356	Restraint lanyard Y kern. 2m +Q.T alu. 17mm +2GO60 aluminium 60mm			0,968Kg
1032357	Restraint lanyard Y kern. 1m +Q.T alu. 17mm +2GO65 aluminium 63mm			1,250Kg
1032358	Restraint lanyard Y kern. 1.5m +Q.T alu. 17mm +2GO65 aluminium 63mm			1,350Kg
1032359	Restraint lanyard Y kern. 2m +Q.T alu. 17mm +2GO65 aluminium 63mm			1,450Kg
1032360	Restraint lanyard Y kern. 1m +Q.T alu. 17mm +2 snap aluminum 26 mm			0,510Kg
1032361	Restraint lanyard Y kern. 1.5m +Q.T alu. 17mm +2 snap aluminum 26 mm			0,590Kg
1032362	Restraint lanyard Y kern. 2m +Q.T alu. 17mm +2 snap aluminum 26 mm			0,680Kg
1032406	Restraint lanyard Y kern. 1 m + trilock karabiner+ 2 GO65 aluminium 63mm			1,160 kg
1032407	Restraint lanyard Y kern. 1,5 m + trilock karabiner+ 2 GO65 aluminium 63mm			1,240 Kg

HONEYWELL FALL PROTECTION FRANCE SAS
35-37 rue de la Bidauderie
F - 18100 Vierzon - France
Tel : +33 2 48 52 40 40
Fax : +33 2 48 71 04 97
Web site : www.honeywellsafety.com