# Sonos Sounder Beacon - Fire

Electronic sounder beacon certified to EN54.

With the TimeSaver base, connections are made to the base during the initial wiring phase which results in faster and more reliable installation. The sounder head 'twists and clicks' into the base on commissioning, avoiding the wiring and connection problems associated with traditional sounders.

With a choice of 32 tones including all the major international standards, the Sonos Sounder Beacon has universal acceptance.

## Features


- **Low current LED beacon**
- **Simple 'First Fix' installation**
- **Weatherproof to IP65 (deep base units)**
- **Choice of lens colours**
- **Tone and volume can be preset or adjusted off-base - 20dB**

## Lens Colour Options






Deep Base

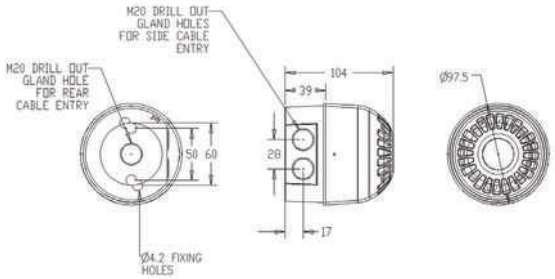


Shallow Base

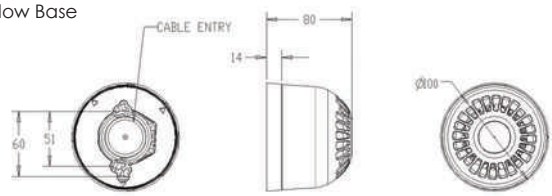


## Specifications

| Combined Part No. | Base Part No. | Head Part No. | Audibility at 1m | Tones | Voltage | Sounder Current |
|---|---|---|---|---|---|---|
| PSC-0047 | PSO-0001 Red shallow base | PSC-0045 Red lens | Up to 106dB (A) | 32 | 17-60V DC | 9-50mA |
| PSC-0050 | PSO-0001 Red shallow base | PSC-0054 Amber lens | Up to 106dB (A) | 32 | 17-60V DC | 9-50mA |
| PSC-0042 | PSO-0003 Red deep base | PSC-0045 Red lens | Up to 106dB (A) | 32 | 17-60V DC | 9-50mA |
| PSC-0049 | PSO-0003 Red deep base | PSC-0054 Amber lens | Up to 106dB (A) | 32 | 17-60V DC | 9-50mA |
| PSC-0059 | PSO-0007 White deep base | PSC-0051 Clear lens, Red LED | Up to 106dB (A) | 32 | 17-60V DC | 9-50mA |

Other colours/combinations are available on request

**IP Rating:** IP65 (deep base) IP21 (shallow base) **Operating Temp:** -25°C to +70°C **Construction:** Flame Retardant Polycarbonate
**Cable Entries:** Deep Base: 2 x 20mm cable glands **Weight:** 0.22kg (shallow base) 0.25kg (deep base)
**Compliance:** EN54 3 Type A (shallow base) EN54 3 Type B (deep base)

klaxon
Signalling Solutions