
DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	FAR0305	10.10.14	

TECHNICAL SPECIFICATIONS	SIGNATURE PRESIDENT (TECHNICAL)

ENERGY ABSORBING WEBBING LANYARD (FAR0305)

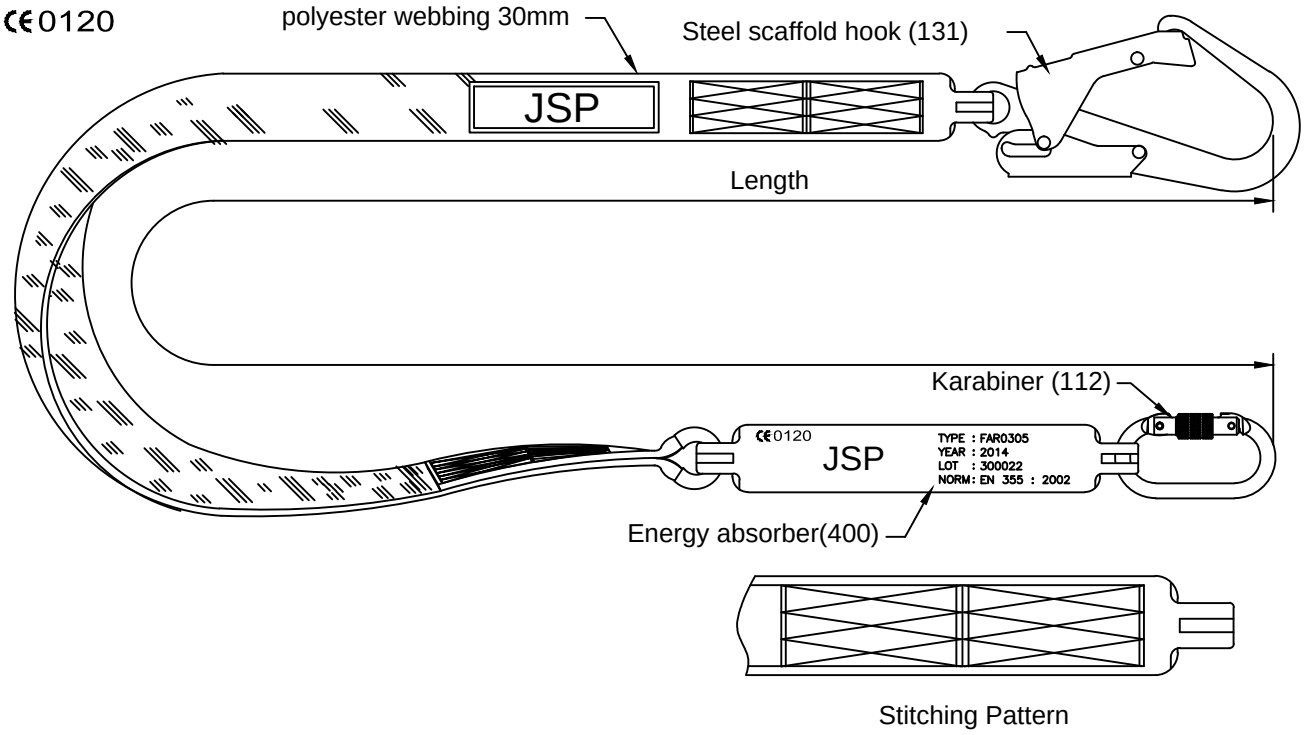

Tested as per EN 355 : 2002

Available Length: 2.0 mtr.

DESIGN

- Webbing lanyard incorporated with Energy absorber (400)
- One side of the lanyard equipped with Karabiner (112) while other side of the lanyard equipped with Steel scaffold hook (131).

WEBBING

- Material : Polyester.
- Width : 30±1mm.
- Breaking strength : 25 kN.

STITCHING THREAD

- Material : High-tenacity polyester.

VITAL TEST COMPLIANCE

- Static Strength : 15 kN for 3 Minutes.
- Dynamic Performance : Maximum breaking force does not exceed 6 kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kg.

WEIGHT

- 2.0 meter : 1100 gm ±10gm

JSP
OXFORD, ENGLAND