
# LPCB7113

Double-touch actuator, spring return Ø22mm Platinum series chromed plastic, 2 flush pushbuttons. Both spring return, Green - Red



| | | | |
|---|---|---|---|
| Product designation | | | Double-touch actuators, spring return - two flush pushbuttons |
| Product type designation | | | LPCB71 |
| **General characteristics** | | | |
| Colour | | | Green/Red |
| Material | | | Polyamide |
| IEC degree of protection | | | IP66, IP67 and IP69K |
| **Mechanical features** | | | |
| Operating force | | kg-lb | <0.5Kg / 1.1lb |
| Mechanical life | | cycles | 1000000 |
| Mounting adapter | | | LPXAU120 |
| Weight | | g | 30 |
| **UL technical data** | | | |
| UL degree of protection | | | Type1, 2, 3R, 4, 4X, 12, 12K |
| **Ambient conditions** | | | |
| Temperature | | | |
| | Operating temperature | | |
| | min | °C | -25 |
| | max | °C | +70 |
| | Storage temperature | | |
| | min | °C | -40 |
| | max | °C | +85 |

## Dimensions

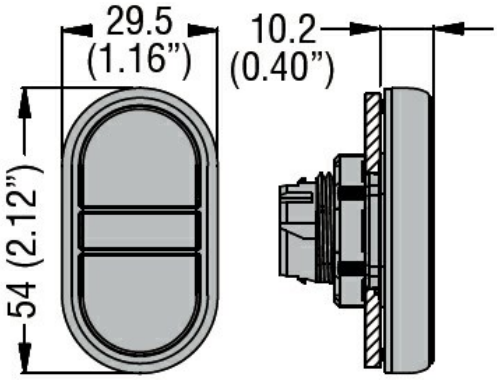


## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 14 |
| IEC/EN/BS 60947-1 |
| IEC/EN/BS 60947-5-1 |
| UL508 |

Certificates


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# LPCB7113

Double-touch actuator, spring return Ø22mm Platinum series chromed plastic, 2 flush pushbuttons. Both spring return, Green - Red

| |
|---|
| CCC |
| cULus |
| EAC |
| RINA |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000221 - Front element for push button |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding