LQ-4N-30



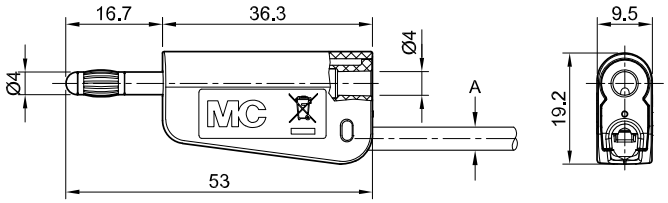

Item number 64.1038-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. Solder connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 V, 19 A / 60 V, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29
Outer diameter	3.0 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-L-4-30; LS-SLQ-4N

Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. © Stäubli 2024 | ec.marcom@staubli.com | Photo credits: Stäubli | **www.staubli.com**