Specifications

Eaton 226161

Catalog Number: 226161

Eaton Moeller® series M22 Telescopic adapters

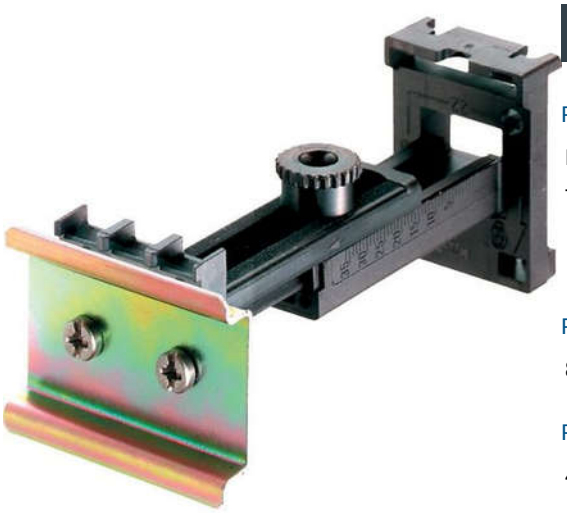

General specifications

Product Name
Eaton Moeller® series M22 Accessory Telescopic clip

Catalog Number
226161

EAN
4015082261610

Product Length/Depth
80 mm

Product Height
40 mm

Product Width
45 mm

Product Weight
0.043 kg

Compliances
CE Marked

Certifications
CSA Std. C22.2 No. 94-91
EN 60947-5
CSA Std. C22.2 No. 14-05
IEC 60947-5
UL 508
VDE
UL
CE
CSA Class No.: 3211-03
UL Category Control No.: NKCR
CSA-C22.2 No. 14-05
CSA File No.: 012528
CSA-C22.2 No. 94-91
IEC/EN 60947-5
CSA
UL File No.: E29184

Powering Business Worldwide

Features & Functions

Fitted with:

35 mm top-hat rail (according to IEC/EN 60715)

Functions

For equalization of the mounting depth of rear mounting devices in CI enclosures, and in cabinets with mounting depths of 115 - 155 mm

For mounting of EASY, FAZ, PKZ, DIL etc. weighing ≤ 0.3 kg

General

Accessory/spare part type

Accessory

Product category

Accessories
Compact PLCs
Control relay easyRelay

Used with

PKE
EC4P
easy200/500/700/800
PKZM0
MFD-CP8

Climatic environmental conditions

Ambient operating temperature - min

-25 °C

Ambient operating temperature - max

70 °C

Communication

Connection to SmartWire-DT

No

Design verification

Equipment heat dissipation, current-dependent Pvid

0 W

Heat dissipation capacity Pdiss

0 W

Heat dissipation per pole, current-dependent Pvid

0 W

Rated operational current for specified heat dissipation (In)

0 A

Static heat dissipation, non-current-dependent Pvs

0 W

10.2.2 Corrosion resistance

Meets the product standard's requirements.

10.2.3.1 Verification of thermal stability of enclosures

Meets the product standard's requirements.

10.2.3.2 Verification of resistance of insulating materials to normal heat

Meets the product standard's requirements.

10.2.3.3 Resist. of insul. mat. to abnormal heat/fire by internal elect. effects

Meets the product standard's requirements.

10.2.4 Resistance to ultra-violet (UV) radiation

Please enquire

10.2.5 Lifting

Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 Mechanical impact

Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions

Meets the product standard's requirements.

10.3 Degree of protection of assemblies

Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances

Meets the product standard's requirements.

10.5 Protection against electric shock

Does not apply, since the entire switchgear needs to be evaluated.

10.6 Incorporation of switching devices and components

Does not apply, since the entire switchgear needs to be evaluated.

10.7 Internal electrical circuits and connections

Is the panel builder's responsibility.

10.8 Connections for external conductors

Is the panel builder's responsibility.

10.9.2 Power-frequency electric strength

Is the panel builder's responsibility.

10.9.3 Impulse withstand voltage

Is the panel builder's responsibility.

10.9.4 Testing of enclosures made of insulating material

Is the panel builder's responsibility.

10.10 Temperature rise

Not applicable.

10.11 Short-circuit rating

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

Resources

Catalogs

eaton-rmq-titan-brochure-br047004en-en-us.pdf

Flip catalog - Product Range Catalog - Command and indication

eaton-pushbuttons-signal-towers-sensors-assortment-overview-catalog-ca047003en-en-us.pdf

Declarations of conformity

DA-DC-00004135.pdf

DA-DC-00004157.pdf

Drawings

eaton-operating-indication-m22-indicator-light-dimensions-002.eps

eaton-operating-m22-indicator-light-dimensions.eps

eaton-operating-m22-telescopic-clip-dimensions.eps

eaton-operating-m22-telescopic-clip-3d-drawing.eps

eCAD model

ETN.226161.edz

Installation instructions

IL04716002Z

Installation videos

RMQ Flat Design

mCAD model

teleskop_adapter.stp

teleskop_adapter

Multimedia

easyE4 SmartWire-DT module with Remote Touch Display and RMQ multi color indicator

MCI Multicolor Light Indicator M22 with SmartWire-DT

RMQ small E-Stop emergency-stop button

MCI MultiColor Light Indicator RMQ compact solution

Sales notes

eaton-control circuit-devices rmq-titan-fl144090en-en-us.pdf

eaton-rmq-mci-multi-color-light-indicator-flyer-fl047005en-en-us.pdf

eaton-rmq-flat-enclosure-flyer-fl047003en-en-us.pdf

eaton-rmq-small-e-stop-flyer-fl047006en-en-us.pdf

System overview

Pilot devices - selection aid

10.12 Electromagnetic compatibility

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 Mechanical function

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia