
IBU 5568

Socket

Ø 4mm | 30 V_{AC} / 60 V_{DC} | 32 A

- for insulated fixture
- with screwed insulated head
- hole Ø 7.5 mm
- tab can be bent up to 90° once
- zum Einbauen in Frontplatten bis 5 mm Dicke
- for fixture in panels up to 5 mm thick
- tab 4.8 mm x 0.8 mm



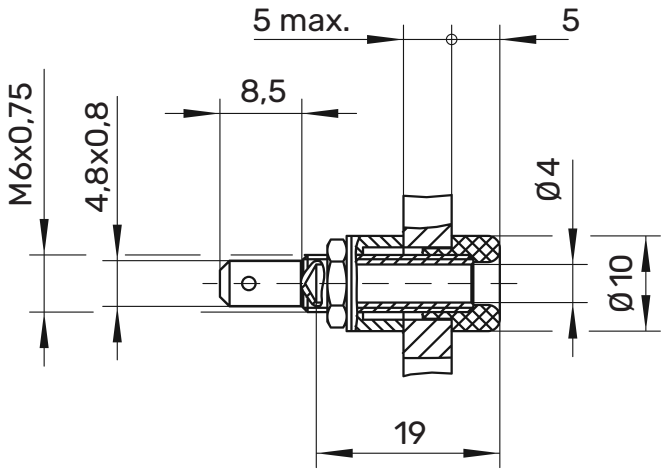

General information

Order No. [1]	**IBU 5568 Ni | Au / ..(colour)**
colours	black, red, blue, yellow, green, grey, white
contact parts	nickel-plated | gold-plated
insulation	PA 6.6 (Polyamid)

Technical data

terminal	cable lug, FR 4.8 x 0.8 mm
transition resistance [4]	5 mΩ (Ni) | 3 mΩ (Au)
rated voltage [2]	30 V_{AC} / 60 V_{DC}
rated current [2]	32 A
operating temperature	from -25 °C to +80 °C
max. torque	60 Ncm
fastening nut	

[1] other contact platings, colours and designs on request
[2] at normal ambient temperatures
[4] depending on contact plating

date: 25.02.2026

Artikelnummern
Article numbers

SCHÜTZINGER

IBU 5568				Ni	Au
●	SW	Schwarz	Black	99010859	99015163
●	RT	Rot	Red	99010860	99015164
●	BL	Blau	Blue	99010862	99017844
●	GE	Gelb	Yellow	99010863	99021685
●	GN	Grün	Green	99010864	99021688
●	GR	Grau	Grey	99010940	99021689
○	WS	Weiß	White	99010861	99021690