# 8LB6EL1

STEADY LIGHT MODULE. Ø62MM. BA15D FITTING, DIRECT SUPPLY, ORANGE



| | | | | |
|---|---|---|---|---|
| Product designation | | | | Signal beacons Ø62mm/2.44" |
| Product type designation | | | | 8LB6EL |
| **General characteristics** | | | | |
| Diameter | | | mm - inch | 62 / 2.44 |
| Colour | | | | Orange |
| IEC degree of protection | | | | IP54 |
| **Mechanical features** | | | | |
| Tightening torque for terminals max | | | Nm | 0.5 |
| Terminals screw | | | | Screw clamp terminals |
| Conductor section | | | | |
| | AWG/Kcmil | | | |
| | | max | | 16 |
| | IEC | | | |
| | | max | mm² | 1.5 |
| Weight | | | g | 60 |
| **Ambient conditions** | | | | |
| Temperature | | | | |
| | Operating temperature | | | |
| | | min | °C | -20 |
| | | max | °C | +50 |
| **Dimensions** | | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# 8LB6EL1

STEADY LIGHT MODULE. Ø62MM. BA15D FITTING, DIRECT SUPPLY, ORANGE

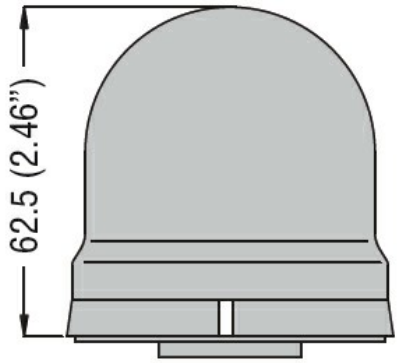


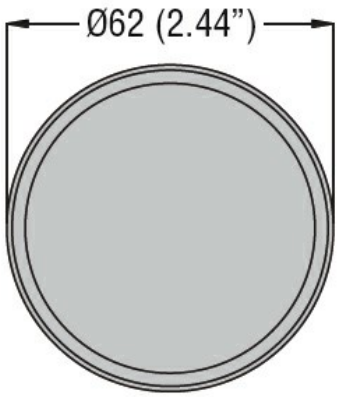


## Wiring diagrams

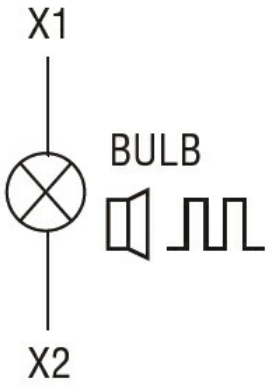


## Certifications and compliance

Compliance

| | |
|---|---|
| | IEC/EN 60947-1 |
| | IEC/EN 60947-5-1 |

Certificates

| | |
|---|---|
| | EAC |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000232 - Optical module for signal tower |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding