
# SEB2-R



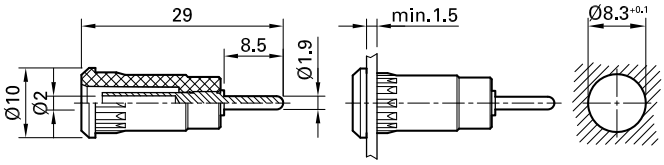


**Item number 65.9193-***

Insulated, rigid, accepting spring-loaded Ø 2 mm plugs with rigid insulating sleeve. The socket is pressed into pre-drilled panels of plastic, metal, etc.Connection: Round connecting pin Ø 1.9 mm.

| Technical data | |
|---|---|
| Diameter of plug system | 2 mm |
| Rated Values | 600 V, CAT III |
| Surface treatment electrical contact | Au |
| Base material electrical contact | CuZn |
| Colours * | 21 22 23 24 25 29 |
| Test accessory acc. to | IEC EN 61010-2-030 |
| Approvals | UR |
| Remarks | Accessories: Press-in tool MB2-S |

**Stäubli Electrical Connectors AG** Stockbrunnenrain 8 4123 Allschwil/Switzerland
Tel.: +41 61 306 55 55 Fax: +41 61 306 55 56 ec.ch@staubli.com www.staubli.com

©2018 Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. Data sheet SEB2-R 10.2018