# DATASHEET - M22-FI3



**Surface mounting enclosure, flat, 3 mounting locations, M22**

**Part no.** M22-FI3
**Catalog No.** 197233

## Technical data

### General

| | | |
|---|---|---|
| Ambient temperature | | |
| Open | °C | -25 - +70 |

## Design verification as per IEC/EN 61439

| | | |
|---|---|---|
| Technical data for design verification | | |
| Operating ambient temperature min. | °C | -25 |
| Operating ambient temperature max. | °C | 70 |


## Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Enclosure for control circuit devices (EC000200)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Housing for command and alarm devices (ecl@ss10.0.1-27-37-12-05 [AKF023014])

| | | |
|---|---|---|
| Number of command positions | | 3 |
| Construction type housing | | Surface mounting housing |
| Material housing | | |
| Material quality housing | | |
| Diameter openings | mm | 22 |
| Colour housing cover | | |
| Degree of protection (IP) | | |
| Degree of protection (NEMA) | | |
| Width | mm | |
| Height | mm | |
| Depth | mm | |

## Dimensions

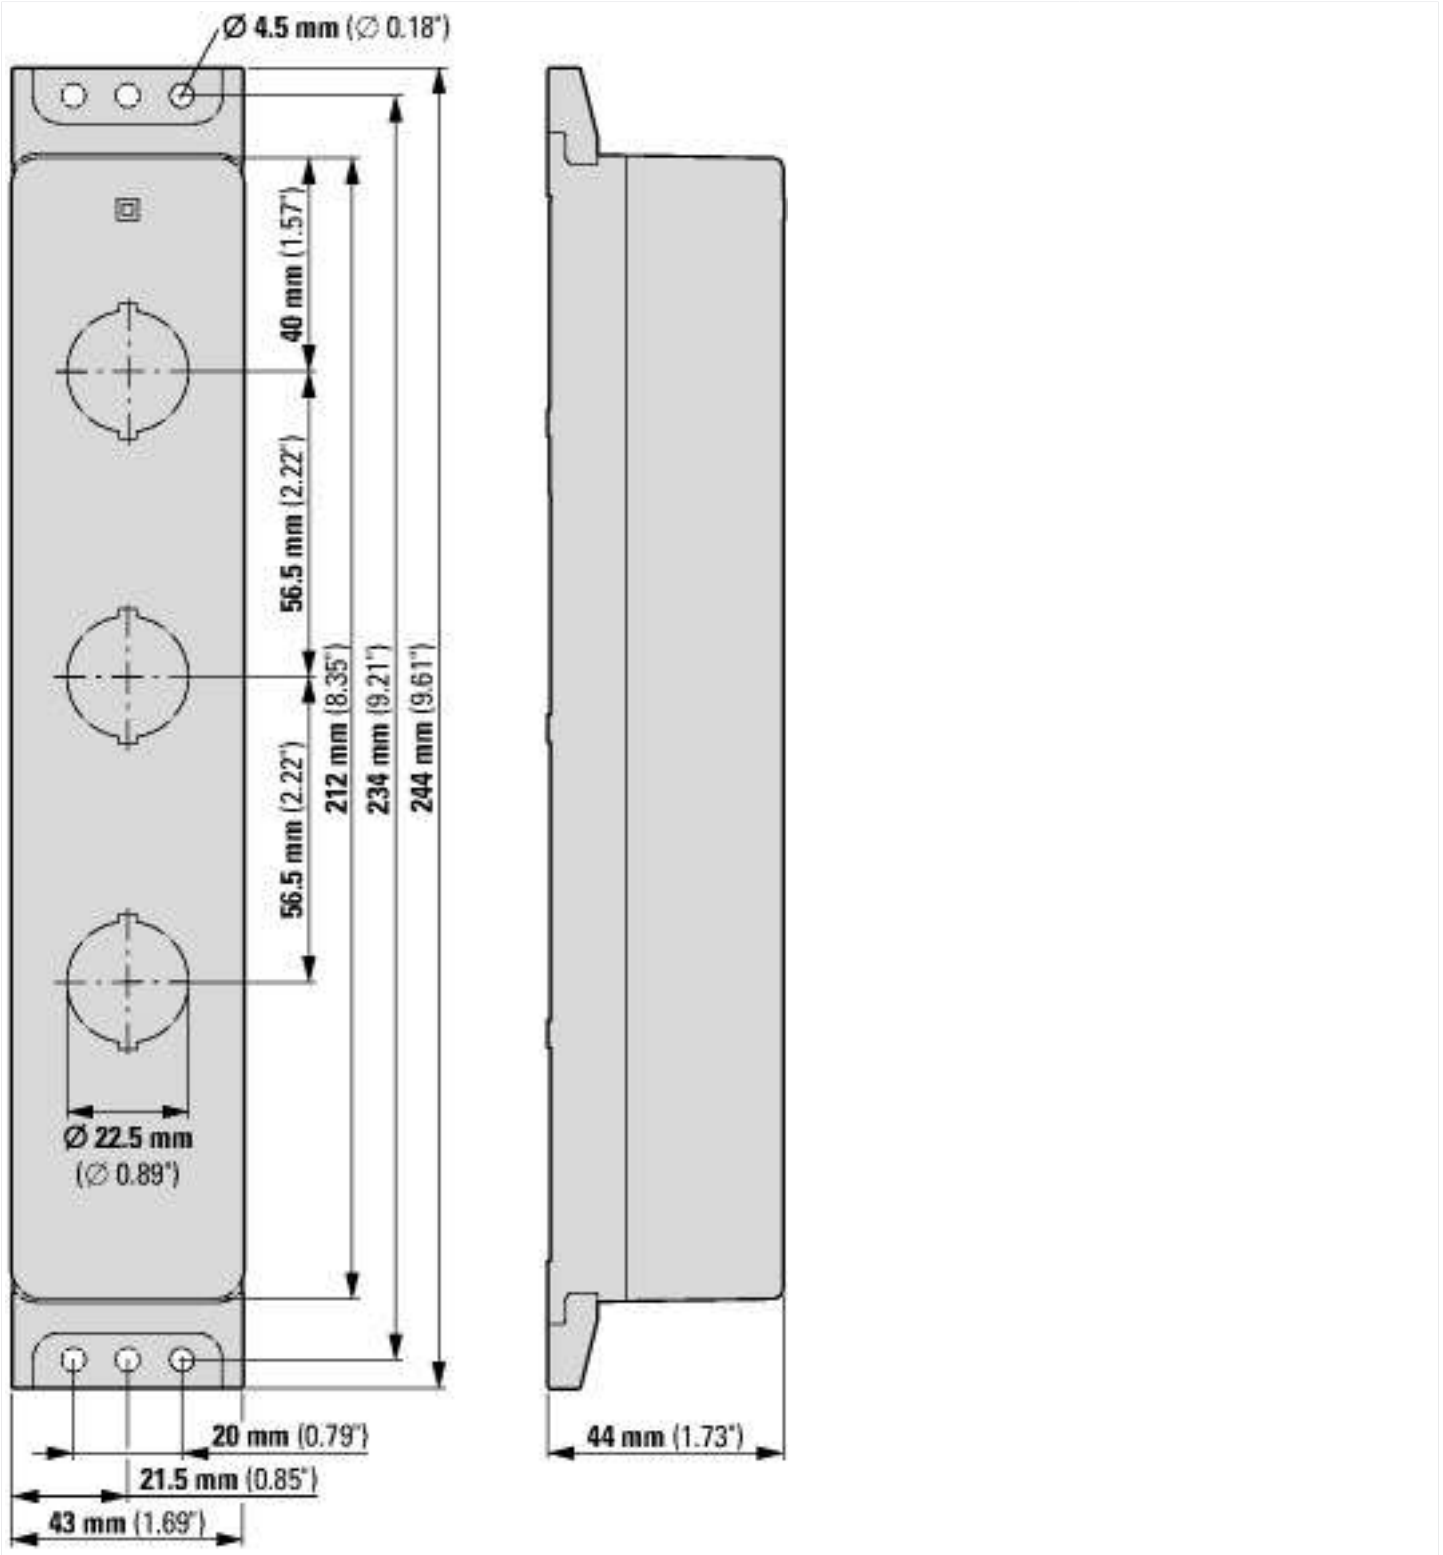
Ø 4.5 mm (∅ 0.18")
40 mm (1.57")
56.5 mm (2.22")
212 mm (8.35")
234 mm (9.21")
244 mm (9.61")
56.5 mm (2.22")
Ø 22.5 mm
(∅ 0.89")
20 mm (0.79")
21.5 mm (0.85")
43 mm (1.69")
44 mm (1.73")

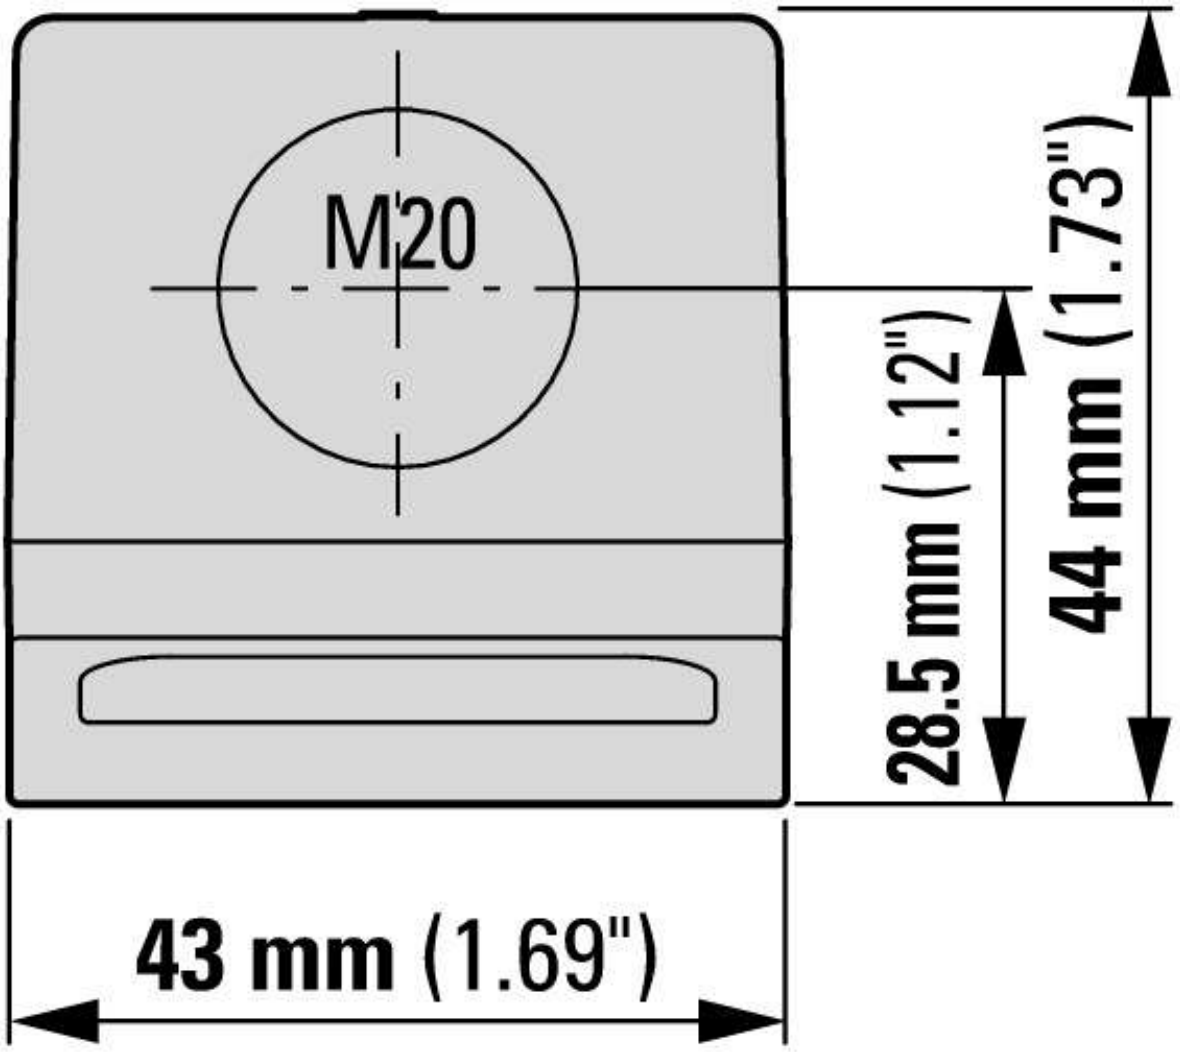



© 11/2018 by Eaton Industries GmbH