Shock-Safe Fuseholder, 5 x 20 mm, Fingergrip, horizontal oder vertical



250 VAC/DC · 1.3 W / 10 A 10 A (UL/CSA)

Description
- Screw type fuse carrier
- PCB mounting horizontal or vertical

Standards
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals
- UL File Number: E41738

Weblinks
pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product


Technical Data

Fuse-Link	5 x 20 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	250 VAC/DC
Rated current	10 A (UL/CSA)
Rated Power Acceptance IEC	1.3 W / 10 A @ Ta 23 °C
Degree of Protection	IP 40
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/56 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Material: Cap	Thermoplastic, black
Unit Weight	6 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	⊟, Type, Rated voltage, Rated current, Approvals


Soldering Methods	Wave
Contact Resistance	< mΩ at 20 mV
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29

Dimension

37.5 mm

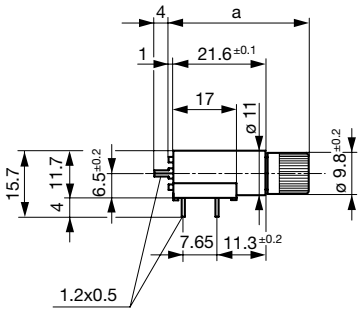

a = 33.5 Variants 7091.4210, 7091.4240 and 7091.4270
a = 38.5 Variant 7091.4400



Drilling diagram

All Variants

Holder	Cap	Mounting	Degree of Protection			GAM T1	NNO	Reference	Order Number
●	Fingergrip	horizontal / vertical	IP 40	●	●	●	●	231409	7091.4210
●	Fingergrip	vertical	IP 40	●				231409L	7091.4240
●	Fingergrip	horizontal	IP 40	●				231409F	7091.4270
●	Fingergrip	vertical	IP 40					231632NL	7091.4400

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging Unit Bulk (10 pcs.)

03.03.2015

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.