
# Product data sheet
## Characteristics

# ZCKD17
## limit switch head ZCKD - steel ball bearing mounted roller lever

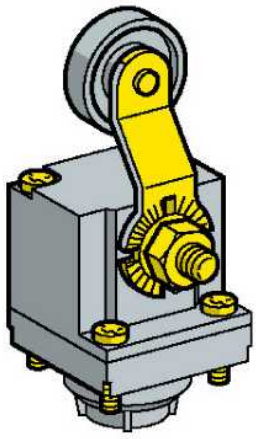

### Main

| | |
|---|---|
| Commercial Status | Commercialised |
| Range of product | OsiSense XC |
| Series name | Standard format |
| Product or component type | Limit switch head |
| Device short name | ZCKD |
| Head type | Rotary head |
| Product compatibility | XCKL<br>XCKM |
| Associated body | ZCKL1<br>ZCKL1H7<br>ZCKL5<br>ZCKL5H7<br>ZCKL6<br>ZCKL6H7<br>ZCKL7<br>ZCKL7H7<br>ZCKL8<br>ZCKL8H7<br>ZCKLD31<br>ZCKLD31H7<br>ZCKLD35<br>ZCKLD35H7<br>ZCKLD37<br>ZCKLD37H7<br>ZCKLD39<br>ZCKLD39H7<br>ZCKM1<br>ZCKM1H29<br>ZCKM1H7<br>ZCKM5<br>ZCKM5H29<br>ZCKM5H7<br>ZCKM6<br>ZCKM6H29<br>ZCKM6H7<br>ZCKM7<br>ZCKM7H29<br>ZCKM7H7<br>ZCKM8<br>ZCKM8H29<br>ZCKM8H7<br>ZCKM9<br>ZCKM9H29<br>ZCKMD31<br>ZCKMD31H29<br>ZCKMD31H7<br>ZCKMD35<br>ZCKMD35H29<br>ZCKMD35H7<br>ZCKMD37<br>ZCKMD37H29<br>ZCKMD37H7<br>ZCKMD39<br>ZCKMD39H29<br>ZCKMD39H7 |
| Movement of operating head | Rotary |
| Type of operator | Roller lever spring return metal (ball bearing mounted) |
| Type of approach | Lateral approach 2 directions |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Complementary

| | |
|---|---|
| Switch actuation | By 30° cam |
| Positive opening | With |
| Head material | Metal |

## Environment

| | |
|---|---|
| Ambient air temperature for operation | -25...70 °C |
| Ambient air temperature for storage | -40...70 °C |
| Environmental characteristic | Standard environment |

## Offer Sustainability

| | |
|---|---|
| Sustainable offer status | Green Premium product |
| RoHS | Compliant - since 1022 - Schneider Electric declaration of conformity |
| REACh | Reference not containing SVHC above the threshold |
| Product environmental profile | Available Download Product Environmental |
| Product end of life instructions | Need no specific recycling operations |