

Field-Attachable Connectors

# BCC A335-0000-10-000-61X5A5-000
# Order Code: BCC070F

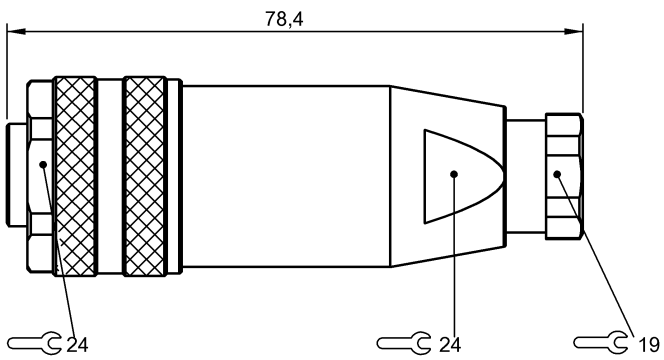


## Basic features

| | |
|---|---|
| **Approval/Conformity** | CE<br>cURus<br>EAC<br>WEEE |

## Electrical connection

| | |
|---|---|
| **Cable diameter D** | 8...10 mm |
| **Connection** | 7/8"-16 UN-Female, Straight, 5-pin |
| **Number of connectable contacts** | 5 |
| **System** | Can be fabricated |

## Electrical data

| | |
|---|---|
| **Operating voltage Ub** | 600 VDC / 600 VAC |
| **Rated current (40 °C)** | 9.0 A |

## Environmental conditions

| | |
|---|---|
| **Ambient temperature** | -25...85 °C |
| **IP rating** | IP67 |

## Material

| | |
|---|---|
| **Material contact carrier** | PUR, PA |
| **Material contacts** | Brass |
| **Material cover nut** | Die-cast zinc |
| **Material grip** | PBT |


## Mechanical data

| | |
|---|---|
| **Connection cross-section** | 0.14...1.5 mm² |
| **Tightening torque pigtail** | 1.5 Nm |
| **Type of wire mounting** | Screw terminals |

## Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

## Connector Drawings




PIN 1-5 usable