MURR ELEKTRONIK
stay connected

M12 MALE 0° B CODED SHIELDED WIREABLE SCREW TERM.

5 POLE max. 0.75mm² 6-8mm PROFIBUS

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration



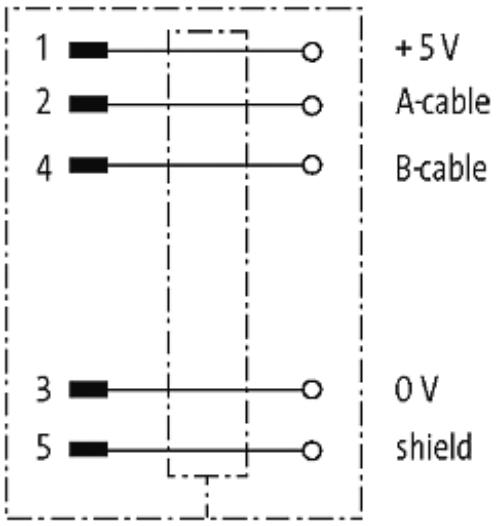

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

MURR ELEKTRONIK
stay connected

Male

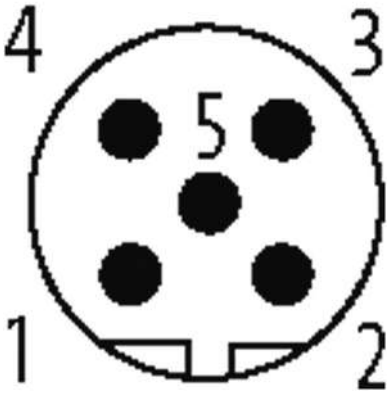

Product may differ from Image

More Info

Form

Form	14001

Technical Data

Operating voltage	max. 60 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category II
Connection cross section	max. 0.75 mm²
Coding	M12, B-coded
Sealing range (cable Ø)	6...8 mm
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Housing	Zinc die casting, matte nickel plated

General data

Pollution Degree	3
Dimensions H × W × D	62×20×20 mm
Temperature range	-40...+85 °C

Commercial data

country of origin	DE

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

customs tariff number	85369010
EAN	4048879198653
eClass	27279218
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com