HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

Plugs

KB 3



CE

Product	KB 3
description	Cable lug with shatter-proof, flexible insulated sleeve with 4 mm diameter transverse hole. Solder connection up to a maximum of 2.5 mm². For connection to bolts from 4 mm to 7 mm diameter. Nickel-plated brass contact material.
operating instruction	BA409
article-no. / *colour	9305851xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 07 white Ni
drawing	
	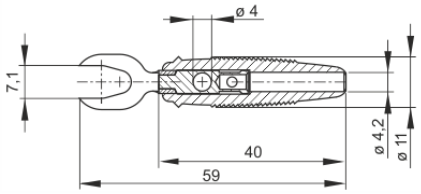
technical data	
connection	solder connection
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010(2)	-25 °C to +70 °C

4 mm system

(1) for normal environmental conditions 5°C to 40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 09.06.2022