
Actuator

Series for Safety switches (SLK, SLM, ENK-VTU, ENM2-VTW)

Description **BETÄTIGER A2 KPL.**	Article number **3911702229**

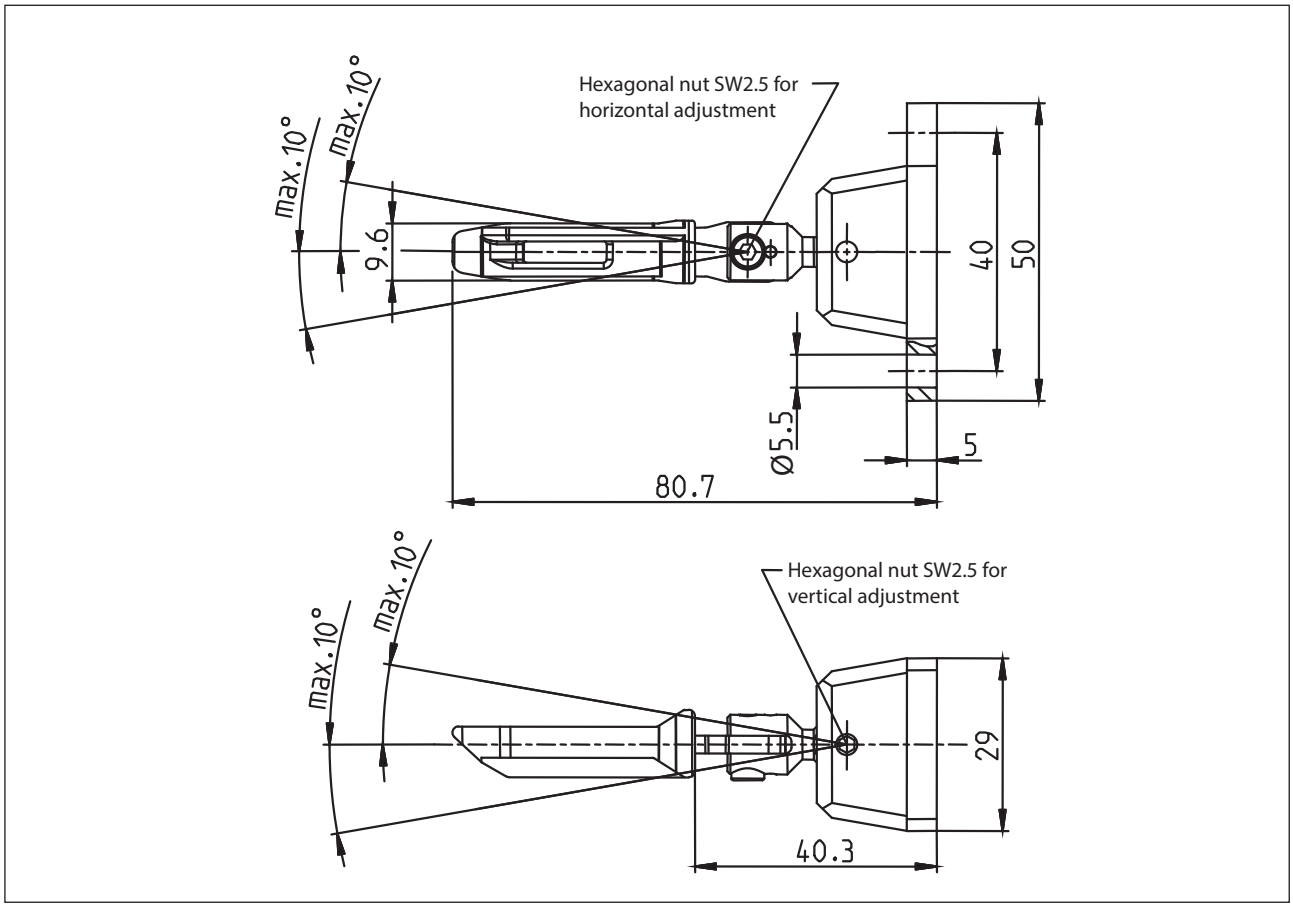

Mechanical data		
Enclosure / Actuator		Steel/PA
Minimum actuating radius	R_{min}	150 mm

Notes
Changing the position of the spring loaded key (in steps of 4 x 90°) is only possible when the whole actuator is not yet mounted to the ground. Allen key SW2,5 provided.

Technical modifications and errors excepted.
The technical datasheet corresponds to the technical state as of 2015-07-22 and will not be removed in case of changes.