MIRO 6.2 pluggable Plug-in module Optocoupler


IN: 24 VDC - OUT: 24 VDC / 6 A

Transistor 6 A
24 V DC

Link to Product

Illustration



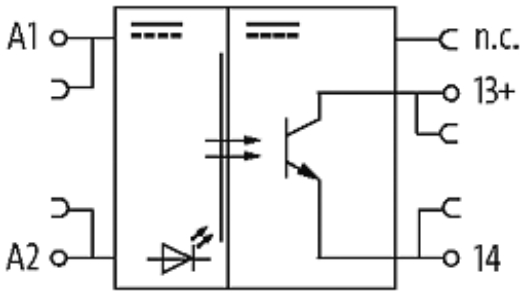

Product may differ from Image

Input

Connection voltage - current	24 V DC (18...30 VAC/DC) - 9 mA
LED display	LED (yellow)

General data

Test isolation voltage	50 V
Surge voltage resistance	2.5 kV
Protection	IP20
Mounting method	pluggable
Dimensions H × W × D	15×5×28 mm

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

Temperature range	-25...+50 °C
Output	
Switching time ON/OFF	15/31 µs
Switching voltage	3...30 V DC
Switching current per output	10 mA...6 A
Saturation voltage (across output)	max. 240 mV
Switching frequency	max. 500/50 Hz (ohm./ind.)
Commercial data	
country of origin	CZ
customs tariff number	85414090
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16