

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| C | ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED WIRE MAP | 12/7/11 | D.FRISIELLO |
| D | ECN5915: REVISED VIEWS OF USB MICRO B MALE | 01/10/12 | DFP |
| E | ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT. | 09/17/12 | DFP |
| E | ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO ON MICRO B END | 1/13/16 | S.LI |

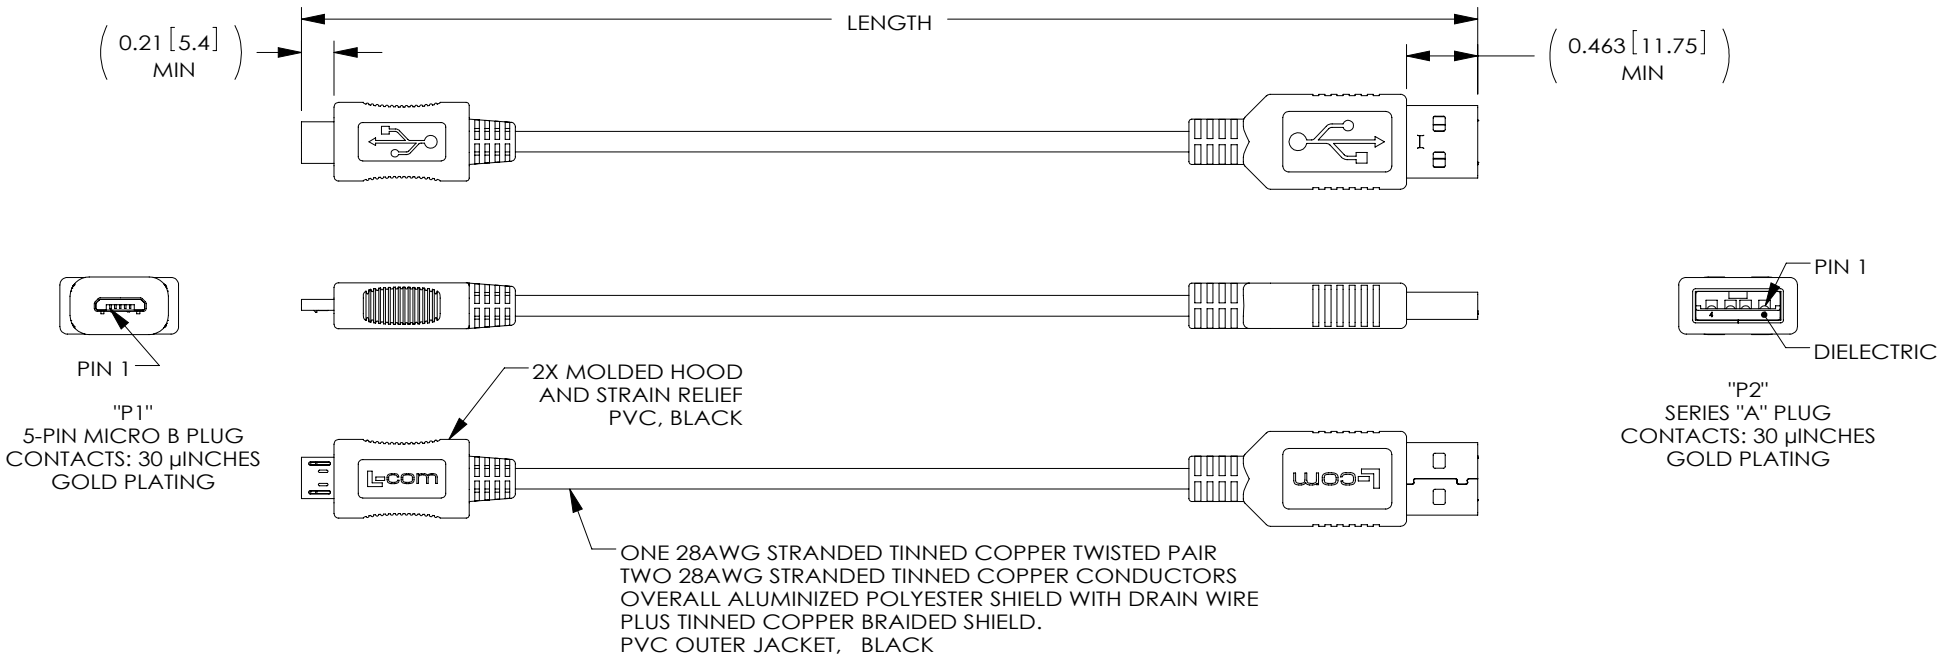


| MODEL NUMBER | LENGTH METERS [FEET] |
|---|---|
| CSMUAMICB-03M | 0.3 [.98] |
| CSMUAMICB-05M | 0.5 [1.64] |
| CSMUAMICB-075M | 0.75 [2.46] |
| CSMUAMICB-1M | 1.0 [3.28] |
| CSMUAMICB-2M | 2.0 [6.56] |
| CSMUAMICB-3M | 3.0 [9.84] |

"P1" WIRING DIAGRAM "P2"

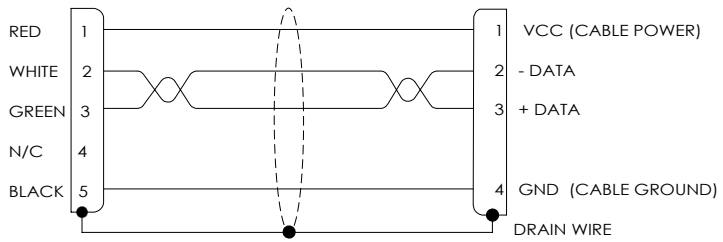


NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY D. PARHAM | 06/03/2010 |
| CHECKED BY D. CASTRO | 06/03/2010 |
| APPROVED BY S. SMITH | 06/03/2010 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CBL, USB-A/MICRO B

SIZE: A | FSCM NO.: 43321 | DWG. NO.: CSMUAMICB | REV.: E

SCALE: NONE | CAD FILE: CSMUAMICB.SLDDRW | SHEET 1 OF 1