Datenblatt - Fiche technique - Data sheet


21.15.2754



ROLINE Patchkabel Kat.6A UTP, Comp. Level, LSOH, schwarz, 1,5 m

Cordon ROLINE UTP Cat.6A / 10 Gigabit, Component Level, LSOH, noir, 1,5 m

ROLINE UTP Patch Cord Cat.6A, Component Level, LSOH, black, 1.5 m

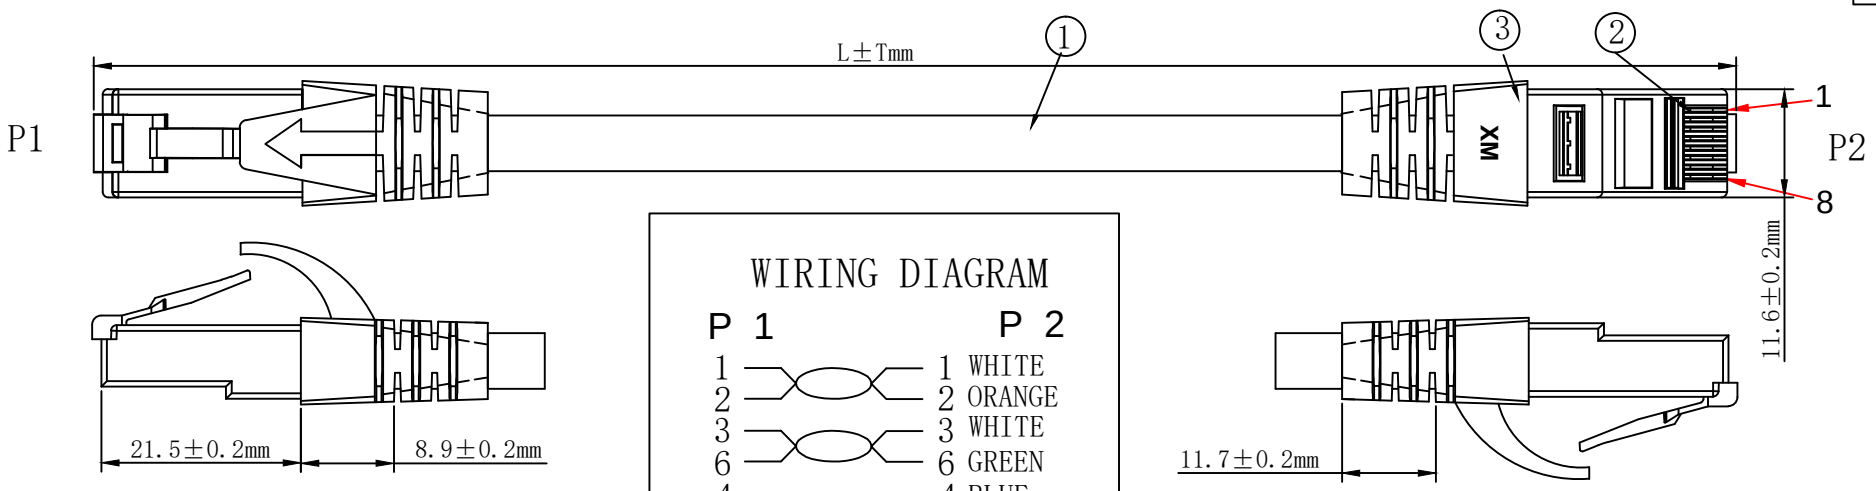

WIRING DIAGRAM

P 1		P 2
1		1 WHITE
2		2 ORANGE
3		3 WHITE
6		6 GREEN
4		4 BLUE
5		5 WHITE
7		7 WHITE
8		8 BROWN
SH		SH

1. ELECTRICAL TEST:
   (1). 100% OPEN SHORT & MISS WIRE TEST;
   (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
   (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6A U/UTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:60mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC black	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent Blue	2PCS	
①	CABLE	S/FTP CAT.6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	

COLOUR:black (PANTONE:black 3C)

ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2986	300mm	±10mm
21.15.2750	500mm	±15mm
21.15.2751	1000mm	±30mm
21.15.2754	1500mm	±45mm
21.15.2752	2000mm	±60mm
21.15.2753	3000mm	±90mm
21.15.2755	5000mm	±150mm
21.15.2756	7500mm	±210mm
21.15.2757	10000mm	±300mm
21.15.2758	15000mm	±450mm
21.15.2759	20000mm	±600mm

ITEM NO.	21.15.2986	21.15.2750	21.15.2751	21.15.2752	21.15.2753
21.15.2754	21.15.2755	21.15.2756	21.15.2757	21.15.2758	21.15.2759
DESC.	ROLINE U/UTP PatchCord CAT.6A,LSOH,Comp.Level,black				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-09-13	A

SECOMP