stay connected

# MIRO,TR,24VDC,24VDC 6A SK OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 6 A

Transistor 6 A
24 V DC
Screw terminals

## Link to Product

### Illustration




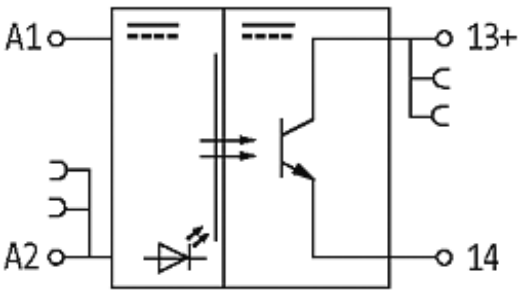


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

MURR ELEKTRONIK
stay connected

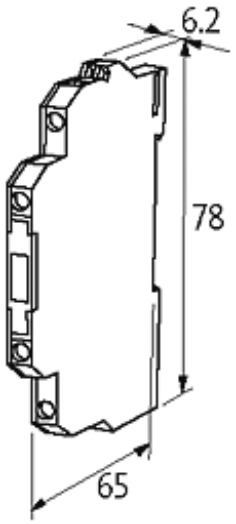


Product may differ from Image

## Approvals

## Input

| | |
|---|---|
| Voltage range ON | 10...53 V DC |
| Voltage range OFF | 0...5 V DC |
| Control current | approx. 10 mA |
| LED display | LED (yellow) |

## General data

| | |
|---|---|
| Test isolation voltage | 2.75 kV |
| Mounting method | DIN-rail mountable (EN 60715) |
| Housing | Black plastic, flame retardant |
| Temperature range | -20...+60 °C |
| Dimensions H × W × D | 78×6.2×65 mm |

## Output

| | |
|---|---|
| Switching voltage | 5...48 V DC |
| Switching current per output | 1 mA...6 A (without derating) |
| Saturation voltage (across output) | max. 0.1 V DC |
| Leakage current (output is open) | max. 25 µA |
| Switching time ON/OFF | 2/5 ms |
| Switching frequency | max. 1/0.1 Hz (resist./ind.) |

## Commercial data

| | |
|---|---|
| country of origin | CZ |
| customs tariff number | 85414090 |
| minimum order quantity | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16