


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6479: REVISE DESCRIPTION TO J1 FROM TYPE A TO B	10/19/12	D.FRISIELLO
F	ECN 7842: REVISED DIM .55 TO .58, FORMAT, ROHS	3/11/15	D.FRISIELLO

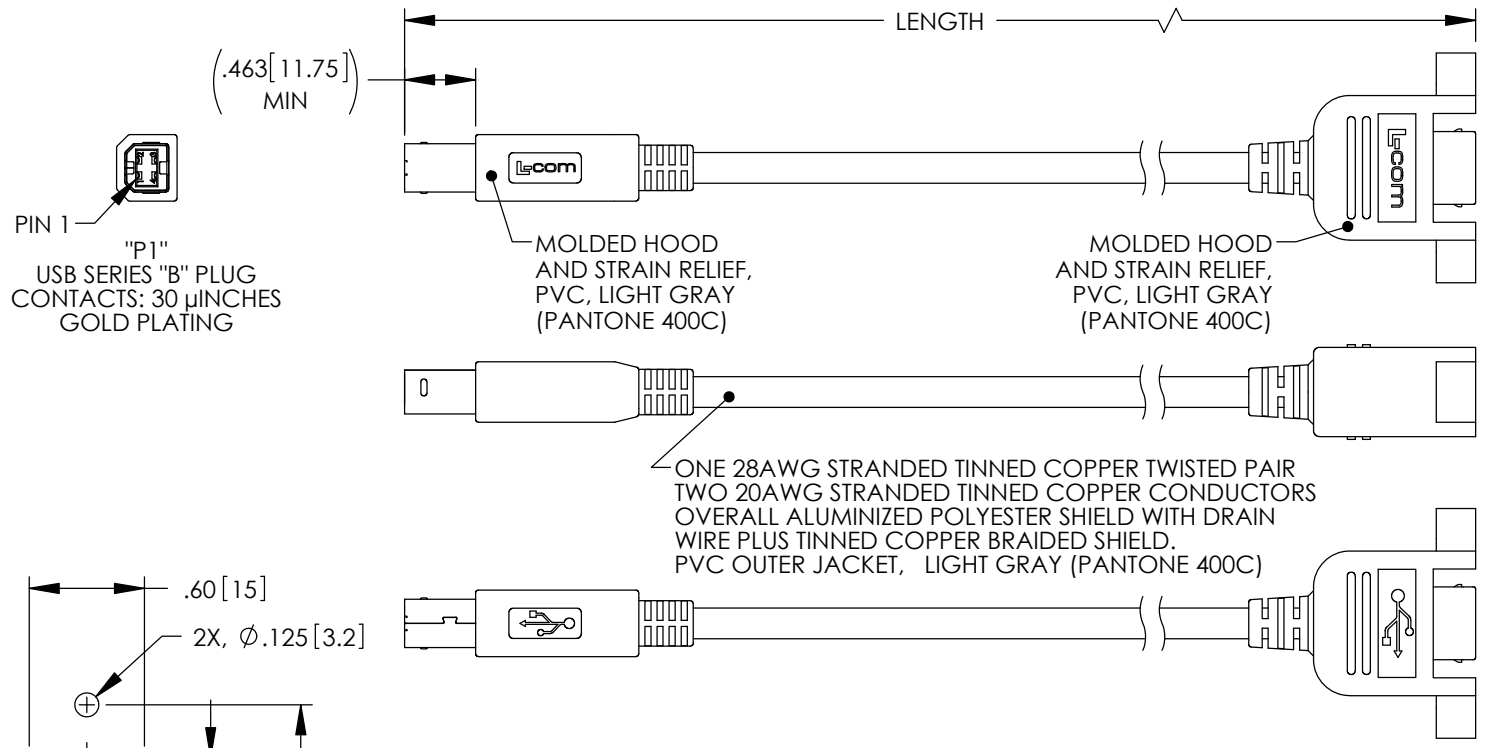


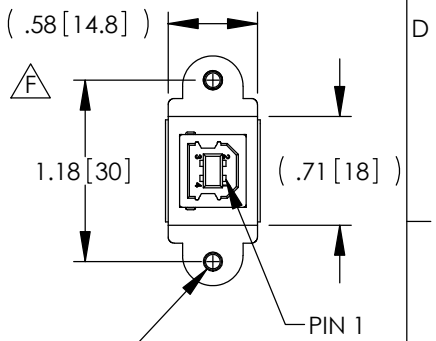

"J1"
USB SERIES "B" RECEPTACLE
PANEL MOUNT
CONTACTS: 30 µINCHES
GOLD PLATING

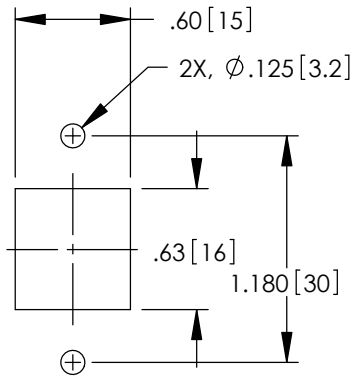

RECOMMENDED
PANEL CUTOUT

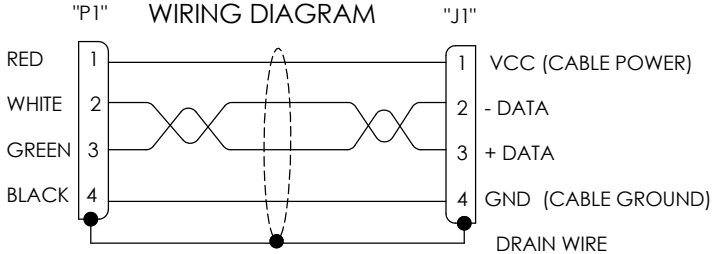

MODEL NUMBER	LENGTH METERS [FEET]
UPMBB-03M	0.3 [.98]
UPMBB-05M	0.5 [1.64]
UPMBB-075M	0.75 [2.46]
UPMBB-1M	1.0 [3.28]
UPMBB-2M	2.0 [6.56]
UPMBB-3M	3.0 [9.84]
UPMBB-4M	4.0 [13.12]
UPMBB-5M	5.0 [16.41]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. MOUNTING HARDWARE INCLUDED: 2X #4-40 X .38 LG. PHILLIPS HD SCREW
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

F

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY D. PARHAM	01/04/2010
CHECKED BY D. CASTRO	01/12/2010
APPROVED BY S. SMITH	01/13/2010

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
CA USB-B PNL/USB-BM

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	UPMBB	F

SCALE: NONE | CAD FILE: UPMBB.SLDDRW | SHEET 1 OF 1