Product data sheet
Characteristics

XZCRA151141C5
jumper cable XZ - male straight M12 4-pin - female straight M12 4-pin - PVC 5m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on and clip-on
Jumper cable end 2	M12 female 4 pins straight connector with screw-on and clip-on
Collar material	Metal
Cable composition	4 x 0.34 mm²
Cable length	5 m
Cable outer diameter	5.3 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.22 kg

Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-25…85 °C static

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	236 g
Package 1 Height	2 cm
Package 1 width	17 cm
Package 1 Length	19 cm

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Contractual warranty

Warranty	18 months

XZCRA151141C5

Dimensions

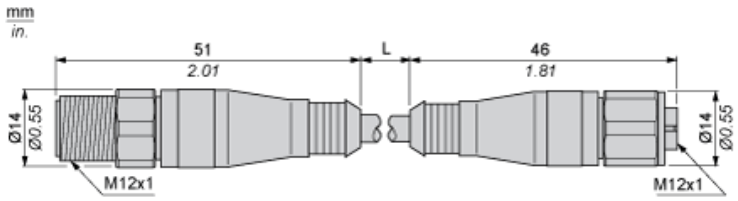

L : Lenght of cable

XZCRA151141C5

Connections and Schemes

